PRODUCT CATALOGUE





3

COMPANY PROFILE

A proud tradition of building top-quality high pressure cleaners / washers

Since 1984, ThoroughClean has specialised in designing and building the toughest and most robust high-pressure water cleaning equipment on the market.

Our pressure washers are well known, respected and widely used by equipment hire companies, truck wash bays, professional contractors, mining companies, industrial workshops, various companies cleaning heavy industrial equipment and many others across the country as well as offshore.

Over the years, we worked tirelessly to design and construct super-duty, long-life and fully rebuildable pressure cleaners. In doing so, we placed particular emphasis on low running costs, easy maintenance, and long-term serviceability.

We also design specialised heavy-duty pressure cleaners to solve very specific customer needs.

At ThoroughClean, we are over-engineering our pressure cleaners — on purpose. Why? To ensure your investment is a good one and that it will last long after all others have failed you.

Every ThoroughClean pressure cleaner is backed by our promise that it has been "over-engineered — on purpose!" With this philosophy firmly in mind, we continue to manufacture small to medium volume runs of standard and customised machines.

Working in our modern new manufacturing facility, we use heavy industrial and high quality robust motors, engines, pumps, frames and parts, CAD drawings for precision, and ERP System for quality control, to produce durable and hard working pressure cleaners that will withstand the toughest conditions. As a result, we have pressure cleaning equipment still working in the field after more than 20 years.

ThoroughClean are the exclusive Australian distributors for HAWK and are an authorised OEM for Honda, Yanmar, Kohler, Perkins, Kubota, Hatz, WEG and Davey.



All prices shown are exclusive of Goods and Services Tax (GST)

Prices and specifications are subject to change without notification

All images are a representation only and are not to scale



CONTENTS PAGE



TRAINING	4	HYDROSTATIC PORTABLE TESTERS	42
		E3R-15C-PT + P6R-17C-PT	43
ELECTRIC PORTABLE BLASTERS	5	DETROI O DIECEI FIRE FIGUITERO	
E3R-22C + E15I-43C	6	PETROL & DIESEL FIRE FIGHTERS	44
E15R-43C	7	PORTABLE + SKID FIRE FIGHTERS	45
E3R-22H + E5R-30H + E10R-36H	8	TRAILER FIRE FIGHTERS	45
PETROL PORTABLE BLASTERS	9	HOT BOXES	46
P6I-17C + P6R-17C	10	AC HOT BOX + DC HOT BOX	47
P13C-36C + P13I-36C + P13R-36C	11	CDECIALICED DIMING	40
P13R-36H	12	SPECIALISED BUILDS	48
P20I-43C + P20R-43C	13	P27R-43C + P13R-36C-RSC	49
P20I-50C + P20R-50C	14	CLISTOM BLILLDS	ΕO
PETROL TRAILER & SKID BLASTERS	15	CUSTOM BUILDS	50
P20R-43C-BB + P20R-43H-BB + SKID	16	HOSE REELS	60
P13R-36C-T + P20R-43C-T	17	SMALL HOSE REELS	61
P20R-43C-TO + P20R-43H-TO	18	BARE REMOTE REELS - STANDARD	62
DIESEL PORTABLE BLASTERS	19	COMPLETE REMOTE REELS	63
D10I-36C + D10R-36C + D10M-36C	20	SPARE PARTS & ACCESSORIES	64
D24M-43C + D24M-50C	21		
		EZY FOAM	65 66
DIESEL TRAILER & SKID BLASTERS	22	HIGH PRESSURE HOSE ROTARY SURFACE CLEANERS	67
D10M-36C-SKID + D10M-36C-BB	23	HIGH PRESSURE GUNS	69
D10M-36H-SKID + D10M-36H-BB	24	COMPLETE GUNS	70
D24R-43H-SKID	25	LANCES	71
D24M-43H-SKID	26	NOZZLE SIZE CALCULATOR	72
D50M-72C-SKID	27	SPRAY NOZZLES / JETS	73
D10M-36C-TO + D10M-36C-T	28	TURBO NOZZLES + REPAIR KITS	75
D10M-36H-TO + D10M-36H-T D10M-36C-TD + D10M-36C-TDP	29 30	LANCE NOZZLE HOLDERS	76
D10M-36C-TD + D10M-36C-TDP D10M-36H-TD + D10M-36H-TDP	31	TELESCOPIC LANCES	77
D24M-50C-TO	32	LANCE ATTACHMENTS	78
D24M-50H-TD + D24M-50H-TDP	33	BY-PASS VALVES SAFETY VALVES	79 81
22 II 1 GOIL 12 1 22 II 1 GOIL 121	-	HOSE & REEL SWIVELS	82
ELECTRIC WASH-BAY BLASTERS	34	QUICK CONNECT FITTINGS	83
WASHMATE 3R-22C (OLD WM10)	35	BSP HIGH PRESSURE FITTINGS	87
WASHMATE 10R-30C (OLD WM1)	35	STAINLESS STEEL HOSE CLAMPS	89
WASHMATE 15R-43C (OLD WM3)	36	WATER FILTERS	90
WASHMATE 10R-36H (OLD WM15)	36	FLOAT SWITCHES	91
WASHMATE 15M-43C (OLD WM4)	37	ELECTRICAL SPARES	92
WASHMATE 15M-43H (OLD WM5)	37	WHIPSOCK	94
UNDER BODY WHEEL WASH	38	SPARE PARTS	95
		BOILERS	96
WASHMATE 32R-8.5C-WW	39	FLAT FREE WHEELS HONDA ENGINE PARTS	101 102
ULTRA HIGH PRESSURE BLASTERS	40	KOHLER & YANMAR ENGINE PARTS	102
OLINA THOLL PRESSURE BLASTERS	40	REDUCTION GEAR BOX	103
D160M-360C	41		
		HAWK PUMPS & SPARES	105


TRAINING

Training is required under AS/NZ 4233.1 for any person undertaking work with a Class A or Class B hydro jetting system. The majority of all pressure cleaners within the industrial workplace fall within Class A, as can be seen from the graph.

We have released an online training platform, **free of charge** to all of our customers, which provides the necessary training for Class A systems, and as it is online, it can be accessed using any web connected device (smartphone, tablet or PC).

If you have not yet received Class A training, please visit www.training.thoroughclean.com.au and register or contact us to find out about our class room training options for Class B training.



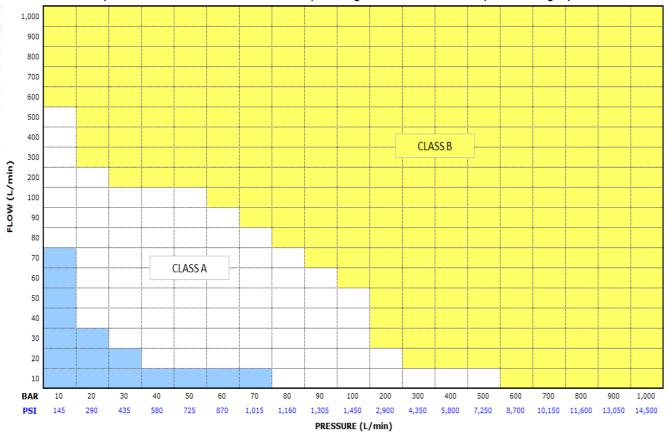

Majority of all pressure cleaners found in local hardware stores (No training required)

CLASS A Majority of all pressure cleaners found in the industrial workplace (Training required)

CLASS B High end, specific use hydro jetting systems, typically found in abrasive cleaning or cutting equipment

ELECTRIC PORTABLE BLASTERS



TYPICAL USERS

- 4WD Enthusiasts
- Mechanics
- Car Detailers
- Transport Companies
- Butchers
- Anywhere with 240V or 415V electricity



E3R-22C

MOTOR AND PUMP

- Italian Heavy Duty, class 'H' wound, single-phase electric motor
- HAWK Triplex Pump HD1115 with brass head & ceramic pistons
- Low speed pump at 1450 RPM

FRAME

Fully hot dipped galvanised steel frame

SUPPLY AND DELIVERY

- Large frame mounted industrial water filter
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 62 x 52 x 54 (cm)
- Weight: 58kg

RANGE Rental Spec. ELECTRIC 3 HP (2.2kVV) 240 Volt - Cold **1100 PSI** @ 10 Amp draw or **1500 PSI** @ 13 Amp draw 11 LPM Flow - (2200 PSI pump)



E15I-43C

MOTOR AND PUMP

- Italian Heavy Duty, class 'F' wound, three-phase electric motor
- HAWK XLT1830 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- DOL motor starter, in stainless steel control box
- Timed shutdown

FRAME

- Fully hot dipped galvanised steel frame
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Large frame mounted industrial water filter
- Pneumatic accumulator to prevent pressure spikes & water hammering
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 95 x 80 x 80 (cm)
- Weight: 160kg

RANGE Industrial Spec. ELECTRIC 15 HP (11kW) 415 Volt - Cold **3000** @ 19 Amp draw **18 LPM** Flow – (4350 PSI pump)





COLD ELECTRIC

E15R-43C

RANGE Rental Spec. ELECTRIC 15 HP (11kW) 415 Volt - Cold **3000** @ 19 Amp draw **18 LPM** Flow – (4350 PSI pump)

RENTAL SPEC

ELECTRIC PORTABLE BLASTERS

MOTOR AND PUMP

- Italian Heavy Duty, class 'F' wound, three-phase electric motor
- HAWK XLT1830 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- DOL motor starter, in stainless steel control box
- Timed shutdown
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frame
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Large frame mounted industrial water filter
- Pneumatic accumulator to prevent pressure spikes & water hammering
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- AquaTech A pressurised break tank, fitted with low water level auto shutdown
- · Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: 95 x 80 x 80 (cm)
- Weight: 180kg



ELECTRIC PORTABLE BLASTERS

HOT WATER ELECTRIC

E3R-22H



RANGE Rental Spec.
ELECTRIC 3 HP (2.2kW) 240 Volt – Hot
1000 PSI @ 10 Amp draw
10 LPM Flow – (2200 PSI pump)

MOTOR AND PUMP

- Italian Heavy Duty, class 'H' wound, single-phase electric motor
- HAWK NHD1015 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAMI

- Fully hot dipped galvanised steel frame
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

BOILER / BURNER

Heavy duty horizontal diesel boiler, set to 70°C

SUPPLY AND DELIVERY

- Extra large frame mounted industrial water filter
- AquaTech A stainless steel water break tank, fitted with low water level auto shutdown
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: $130 \times 85 \times 105$ (cm)

E5R-30H

• Weight: 270kg



RANGE Rental Spec.

ELECTRIC 5.5 HP (4kW) 415 Volt – Hot

2300 PSI @ 8 Amp draw

12.5 LPM Flow – (3000 PSI pump)

Same features as the E3R-22H but with a larger motor and pump

- Italian Heavy Duty, class 'H' wound, three-phase electric motor
- HAWK NMT1220 Triplex Pump with brass head & ceramic pistons
- Size: 130 x 85 x 105 (cm)
- Weight: 280kg

E10R-36H



RANGE Rental Spec. **ELECTRIC** 10 HP (7.5kW) 415 Volt – **Hot 2800 PSI** @ 13 Amp draw **18 LPM** Flow – (3625 PSI pump)

Same features as the E3R-30H but with a larger motor and pump

- Italian Heavy Duty, class 'H' wound, three-phase electric motor
- HAWK NMT1825 Triplex Pump with brass head & ceramic pistons
- Size: 130 x 85 x 105 (cm)
- Weight: 310kg



PETROL PORTABLE BLASTERS



TYPICAL USERS

- Boat Yards / Slipways / Port Authorities
- Cleaning Contractors
- Rental Companies
- Car Yards
- Roof Cleaners
- Anywhere outdoors where electricity sources are not readily available and diesel is not required. (Cheaper than diesel units)



P6I-17C

RANGE Rental Spec. HONDA PETROL 6.5 HP Class - Recoil Start - Cold **2000 PSI** (1750 PSI pump) 12 LPM Flow

ENGINE AND PUMP

- Genuine Honda GX200 recoil start engine
- HAWK NHD1215 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

COLD PETROL 6 HP



Fully hot dipped galvanised steel frame

SUPPLY AND DELIVERY

- Large frame mounted industrial water filter
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: $62 \times 59 \times 54$ (cm)
- Weight: 58kg



HONDA PETROL 6.5 HP Class - Recoil Start - Cold

RANGE Rental Spec.

12 LPM Flow

2000 PSI (1750 PSI pump)

P6R-17C

ENGINE AND PUMP

- Genuine Honda GX200 recoil start engine
- HAWK NHD1215 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox



• Fully hot dipped galvanised steel frame

SUPPLY AND DELIVERY

- · Large frame mounted industrial water filter
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 62 x 59 x 54 (cm)
- Weight: 58kg



COLD PETROL 13 HP

3 Models Available

P13C-36C

RANGE Commercial Spec. HONDA PETROL 13 HP Class - Recoil Start - Cold **3500 PSI** (3625 PSI pump) 17 LPM Flow

BUILT TO SINCE 1984

OMMERCIAL SPEC

11

PETROL PORTABLE BLASTERS

ENGINE AND PUMP

- Genuine Honda GX390 recoil start engine
- HAWK NPM1725 Triplex Pump with brass head & ceramic pistons
- Direct Drive, high speed pump


FRAME

- Fully hot dipped galvanised steel frame
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Frame mounted industrial water filter
- 20m double wire HP hose
- HAWK VBA by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 95 x 80 x 80 (cm)
- Weight: 115kg





Same as the P13C-36C with the following differences

- HAWK NPM1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- Soft acting, frame mounted by-pass valve
- Size: 95 x 80 x 80 (cm)
- Weight: 120kg



P13R-36C

RANGE Rental Spec. HONDA PETROL 13 HP Class - Recoil Start - Cold **3000 PSI** (3625 PSI pump) 18 LPM Flow

Same machine as the P13I-36C with the following added features

- LubeBuddy An extra oil tank to keep pump well lubricated
- AguaTech A pressurised break tank, fitted with low water level auto shutdown
- · Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: 95 x 80 x 80 (cm)
- Weight: 148kg





PETROL PORTABLE BLASTERS

Featured Machine

HOT PETROL 13 HP

P13R-36H

RANGE Rental Spec. HONDA PETROL 13 HP Class - Electric Start - Hot **3000 PSI** (3625 PSI pump) 18 LPM Flow

ENGINE AND PUMP

- Genuine Honda GX390 electric start engine
- HAWK NPM1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well

FRAME

- Fully hot dipped galvanised steel frame
- Stainless steel 23 litre fuel tank
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

BOILER / BURNER

Heavy duty horizontal diesel boiler, set to 70°C

SUPPLY AND DELIVERY

- Extra large frame mounted industrial water filter
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- AquaTech A stainless steel water break tank, fitted with low water level auto shutdown
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- Size: 135 x 85 x 110 (cm)
- Weight: 350kg



COLD PETROL 20 HP (4350 PSI PUMP)

2 Models Available

P20I-43C

RANGE Industrial Spec. HONDA PETROL 20 HP Class Electric Start - Cold **3500 PSI** (4350 PSI pump) 18 LPM Flow

ENGINE AND PUMP

- Genuine Honda V-twin GX630 electric start engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

- Fully hot dipped galvanised steel frame
- Stainless steel 23 litre fuel tank
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Extra large frame mounted industrial water filter
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 125 x 85 x 95 (cm)
- Weight: 160kg



13

PETROL PORTABLE BLASTERS



P20R-43C

RANGE Rental Spec. HONDA PETROL 20 HP Class Electric Start - Cold **3500 PSI** (4350 PSI pump) 18 LPM Flow

Same machine as the P20I-43C with the following added features

- LubeBuddy An extra oil tank to keep pump well lubricated
- AquaTech A stainless steel water break tank, fitted with low water level auto shutdown
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: $125 \times 85 \times 95$ (cm)
- Weight: 187kg



COLD PETROL 20 HP (5000 PSI PUMP)

2 Models Available

P20I-50C

RANGE Industrial Spec.
HONDA PETROL 20 HP Class Electric Start – Cold
4500 – 5000 PSI (5000 PSI pump)
17 LPM Flow

ENGINE AND PUMP

- Genuine Honda V-twin GX690 electric start engine
- HAWK PXi1735 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

- Fully hot dipped galvanised steel frame
- Stainless steel 23 litre fuel tank
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Extra large frame mounted industrial water filter
- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 106 x 80 x 83 (cm)
- Weight: 160kg



P20R-50C

RANGE Rental Spec.

HONDA PETROL 20 HP Class Electric Start – Cold

4500 – 5000 PSI (5000 PSI pump)

17 LPM Flow

Same machine as the P20I-50C with the following added features

- LubeBuddy An extra oil tank to keep pump well lubricated
- AquaTech A stainless steel water break tank, fitted with low water level auto shutdown
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: 125 x 85 x 95 (cm)
- Weight: 187kg

CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THESE MODELS





RENTAL SPEC

PETROL TRAILER & SKID BLASTERS



TYPICAL USERS

- Rental Companies
- Cleaning Contractors
- Roof Cleaners
- Painting Contractors
- Drain Cleaners
- Council Street / Parking Lot Cleaning
- Any mobile cleaning applications, where diesel is not required



PETROL TRAILER & SKID BLASTERS

PETROL SKID 20 HP

P20R-43C-BB

RANGE Rental Spec.

HONDA PETROL 20 HP Class – Electric Start – Cold 3500 PSI (4350 PSI pump)

RENTAL SPEC

22 LPM Flow

ENGINE AND PUMP

Genuine Honda V-twin GX630 electric start engine
HAWK XLT2230 Triplex Pump with brass head & ceramic pistons

• Low speed pump at 1450 RPM with 2:1 gearbox

FRAMI

Fully hot dipped galvanised steel frame, forkliftable

Stainless steel 23 litre fuel tank

Engine vibration mounted on separate sub-frame

• 1000 litre, white IBC water tank

• Four AS certified D-shackle lifting lugs

SUPPLY AND DELIVERY

• Soft acting, frame mounted by-pass valve

Heavy duty, galvanised hose reel with 30m double wire HP hose

• Size: 220 x 130 x 138 (cm)

Weight: 350kg

P20R-43H-BB

RANGE Rental Spec.

HONDA PETROL 20 HP Class Electric Start – Hot 3500 PSI (4350 PSI pump)

22 LPM Flow

Same machine as the P20R-43C-BB with the following added features

Vertical boiler with ½" mild steel coils, set to 70°C

• Size: 220 x 130 x 138 (cm)

• Weight: 623kg



RENTAL SPEC

P20R-43H-SKID

RANGE Rental Spec.

HONDA PETROL 20 HP Class Electric Start – Hot

3500 PSI (4350 PSI pump)

22 LPM Flow

ENGINE AND PUMP

• Genuine Honda V-twin GX630 electric start engine

• HAWK XLT2230 Triplex Pump with brass head & ceramic pistons

• Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

• Fully hot dipped galvanised steel frame, forkliftable

• Stainless steel 23 litre fuel tank


• Engine vibration mounted on separate sub-frame

• Vertical boiler with ½" mild steel coils, set to 70°C

SUPPLY AND DELIVERY

• Size: 133 x 71 x 146 (cm)

• Weight: 335kg



COLD PETROL IBC TRAILER

2 Models Available

P13R-36C-T

RANGE Rental Spec.
HONDA PETROL 13 HP Class – Recoil Start – Cold
3000 PSI (3625 PSI pump)
18 LPM Flow

ENGINE AND PUMP

• Genuine Honda GX390 recoil start engine

- HAWK NPM1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated



FRAME

Heavy Duty 4x4 style, fully hot dipped galvanised trailer

• Land Cruiser style wheels on 2-ton axle with spare wheel

 Mechanical disc brakes with manual hand brake

- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- 1000 litre, white IBC water tank



- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- Size: 360 x 185 x 180 (cm)
- Weight: 600kg

P20R-43C-T

RANGE Rental Spec.

HONDA PETROL 20 HP Class – Electric Start – Cold
3500 PSI (4350 PSI pump)
22 LPM Flow

Same features as the P13R-36C-T with the following differences

Genuine Honda V-twin GX630 electric start engine
 HAWK XLT2230 Triplex Pump with brass head & ceramic pistons

Stainless steel fuel tank (23 litres)
Size: 360 x 185 x 180 (cm)

Weight: 600kg





PETROL TRAILER & SKID BLASTERS

PETROL POLY TRAILER 20 HP

2 Models Available

P20R-43C-TO

RANGE Rental Spec. HONDA PETROL 20 HP Class - Electric Start - Cold **3500 PSI** (4350 PSI pump) 22 LPM Flow

ENGINE AND PUMP

- Genuine Honda V-twin GX630 electric start engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated



- Heavy Duty 4x4 style, fully hot dipped galvanised trailer • Land Cruiser style wheels on
- 2-ton axle with spare wheel Mechanical disc brakes with
- manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel fuel tank (23 litres)
- 1000 litre, red poly water tank



- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valveStainless steel lance with professional gun
- Size: 410 x 185 x 180 (cm)
- Weight: 700kg

P20R-43H-T0

RANGE Rental Spec.

HONDA PETROL 20 HP Class - Electric Start - Hot 3500 PSI (4350 PSI pump) 22 LPM Flow

Same machine as the P20R-43C-TO with the following added features



Popular Alternative to the Hot Water Diesel Trailer

DIESEL PORTABLE BLASTERS



TYPICAL USERS

- Construction Sites
- Equipment Cleaning
- Rental Companies
- Cleaning Contractors
- Painting Contractors
- Mine Sites (for models fitted with Mine Spec features)
- Any outdoor application where the durability of a diesel engine is required.
- Applications where alternative fuel sources are limited, such as in-service cleaning of road working equipment.



21

COLD DIESEL 10 HP

D10I-36C



RANGE Industrial Spec.

YANMAR DIESEL 10 HP – Electric Start – Cold
3000 PSI (3625 PSI pump)
15 LPM Flow

ENGINE AND PUMP

- Yanmar 10HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

- Fully hot dipped galvanised steel frame
- 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- 20m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 95 x 80 x 80 (cm)
- Weight: 157kg





RANGE Rental Spec.

YANMAR DIESEL 10 HP – Electric Start – Cold
3000 PSI (3625 PSI pump)
15 LPM Flow

Same machine as the D10I-36C with the following added features

- Stainless steel control box with:
 - Push to start button
 - Hour meter
 - E-Stop
 - Engine and water fault lights
- LubeBuddy An extra oil tank to keep pump well lubricated
- AquaTech A pressurised break tank, fitted with low water level auto shutdown
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: $95 \times 80 \times 80$ (cm)
- Weight: 185kg





RANGE Mine Spec.
YANMAR DIESEL 10 HP – Electric Start – Cold
3000 PSI (3625 PSI pump)
15 LPM Flow

Same machine as the D10R-36C with the following added features

- MINE Spec Compliant
- Size: 95 x 80 x 80 (cm)
- Weight: 190kg

MINE SPEC FEATURES:

- Exhaust spark arrestor
- Engine drip tray
- Lockable battery isolator
- Covered battery terminals



COLD DIESEL 24 HP (MINE SPEC)

2 Models Available

RANGE Mine Spec.

22 LPM Flow

3400 PSI (4350 PSI pump)

D24M-43C

ENGINE AND PUMP

- Kohler 24 HP electric start air-cooled diesel engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frame
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
 Size: 125 x 85 x 95 (cm)
- Weight: 330kg



KOHLER DIESEL 24 HP - Electric Start - Cold

BUILT TO

MINE SPEC

MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- Lockable battery isolator
- Covered battery terminals
- Double wire insulation

D24M-50C



RANGE Mine Spec.

KOHLER DIESEL 24 HP – Electric Start – Cold 4500 – 5000 PSI (5000 PSI pump) 21 LPM Flow

Same features as the D24M-43C with the following differences

- HAWK PXi2135 Triplex Pump with brass head & ceramic pistons
- Higher rated fittings and components to handle the high pressures.
- Size: 125 x 85 x 95 (cm)
- Weight: 270kg

CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THIS UNIT





Non Mine Spec Versions Available for Both Models

DIESEL PORTABLE BLASTERS

DIESEL TRAILER & SKID BLASTERS



TYPICAL USERS

- Iron Mines
- Gold Mines
- Coal Mines (Non Ex Environments)
- Anywhere that doesn't allow the use of petrol engines.

TYPICAL MINE SPEC FEATURES

- Emergency-Stop
- Engine Drip Tray
- Exhaust Spark Arrestor
- Double Wire Insulation
 ON TRAILERS
 - High Vis Tape
 - Painted Draw Bar
- Wheel Nut Indicators
 - And Many More



COLD DIESEL 10 HP (MINE SPEC SKID)

2 Models Available

D10M-36C-SKID

RANGE Mine Spec.
YANMAR DIESEL 10 HP – Electric Start – Cold
3000 PSI (3625 PSI pump)
15 LPM Flow

ENGINE AND PUMP

- Yanmar 10 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 125 x 85 x 80 (cm)
- Weight: 220kg





MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- Lockable battery isolator
- Covered battery terminals
- Double wire insulation

D10M-36C-BB

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Cold
3000 PSI (3625 PSI pump)
15 LPM Flow

Same machine as the D10M-36C-SKID with the following differences

1000 litre, white IBC water tank
Four AS certified D-shackle lifting lugs
Double water intake to pump with dual filters
Size: 220 x 130 x 138 (cm)
Weight: 350kg



- 2kg Fire extinguisher
- High Vis tape all round
- Starter motor isolator
- Anderson type jump-start receptacle
- Certified lifting lugs



DIESEL TRAILER & SKID BLASTERS

HOT DIESEL 10 HP (MINE SPEC SKID)

2 Models Available

D10M-36H-SKID

ENGINE AND PUMP

- Yanmar 10 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

BOILER / BURNER

Vertical boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- Engine vibration mounted on separate sub-frame
- Stainless steel fuel tank to boiler (23 litres)
- Stainless steel control box with hour meter & E-stop

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 133 x 71 x 146 (cm)
- Weight: 335kg

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Hot
2600 - 3000 PSI (3625 PSI pump)
15 LPM Flow





MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

Non Mine Spec Version Also Available

D10M-36H-BB

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Hot
2600 - 3000 PSI (3625 PSI pump)
15 LPM Flow

Same machine as the D10M-36H-SKID with the following differences

- 1000 litre, white IBC water tank
- Four AS certified D-shackle lifting lugs
- Double water intake to pump with dual filters
- Size: 220 x 130 x 138 (cm)
- Weight: 350kg

ADDITIONAL MINE SPEC FEATURES:

- 2kg Fire extinguisher
- Engine drip tray
- High Vis tape all round
- Certified lifting lugs



HOT DIESEL 24 HP (NON MINE SPEC SKID)

D24R-43H-SKID

RANGE Rental Spec.

KOHLER DIESEL 24 HP Class – Electric Start – Hot
3000 - 3600 PSI (4350 PSI pump)

22 LPM Flow

ENGINE AND PUMP

- Kohler 24 HP electric start air-cooled diesel engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

SINCE 1984 RENTAL SPEC

25

DIESEL TRAILER & SKID BLASTERS

BOILER / BURNER

 Super heavy duty horizontal boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- Engine is vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 90 litre stainless steel fuel tank supplies engine & boiler

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Thermoshield auto water dump valve
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- Size: 140 x 85 x 150 (cm)
- Weight: 535kg



RANGE Mine Spec.

PERKINS DIESEL 24 HP Class – Electric Start – Hot
3000 - 3600 PSI (4350 PSI pump)

22 LPM Flow

AUTOMATIC ENGINE

SHUT-DOWNS:

Low fuel

Low water supply

Pump oil over temp

MINE SPEC FEATURES:

Exhaust spark arrestor

Double wire insulation

Lockable battery isolator

Covered battery terminals

Low oil to pump

Emergency-stop

ENGINE AND PUMP

- Perkins 24 HP Class electric start water-cooled diesel engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

BOILER / BURNER

 Super heavy duty horizontal boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- Engine is vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 90 litre (12-hr) Galvanised fuel tank supplies engine & boiler

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Thermoshield auto water dump valve
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 120 x 120 x 140 (cm)
- Weight: 720kg





COLD DIESEL 50 HP (MINE SPEC SKID)

D50M-72C-SKID

RANGE Mine Spec.

PERKINS DIESEL 50 HP Class – Electric Start – Cold

7000 PSI (7250 PSI pump)

30 LPM Flow

ENGINE AND PUMP

- Perkins 50 HP Class electric start water-cooled diesel engine Other engines avaiable for this model.
- HAWK HHP30 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1000 RPM, belt driven
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- Engine is vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 90 litre (12-hr) Galvanised fuel tank supplies engine

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Twin stainless steel water break tank, fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Thermoshield auto water dump valve
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 120 x 140 x 155 (cm)

CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THIS UNIT





27


DIESEL TRAILER & SKID BLASTERS

AUTOMATIC ENGINE SHUT-DOWNS:

- Low water supply
- Low oil to pump
- Low fuel

MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Lockable battery isolator
- Covered battery terminals
- Double wire insulation

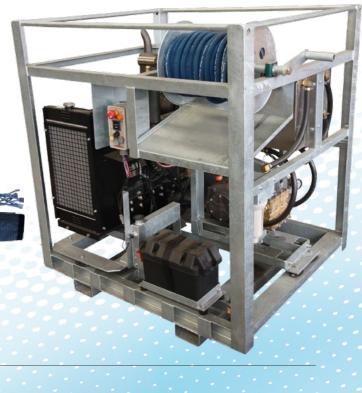

29

COLD DIESEL 10 HP (MINE SPEC TRAILER)

2 Single Axle Models Available

D10M-36C-TO

ENGINE AND PUMP

Yanmar 10 HP electric start air-cooled diesel engine

HAWK NPM1525R Triplex Pump with brass head & ceramic pistons

Low speed pump at 1450 RPM with 2:1 gearbox

 LubeBuddy - An extra oil tank to keep pump well lubricated

FRAM

Heavy Duty 4x4 style, fully hot dipped galvanised trailer
Land Cruiser style wheels on

2-ton axle with spare wheel

 Mechanical disc brakes with manual hand brake

• LED side clearance lights

• Engine vibration mounted on separate sub-frame

• Stainless steel control box with hour meter & E-stop

• 1000 litre, red poly water tank

SUPPLY AND DELIVERY

• Double water intake to pump with dual filters

Fitted with low water level auto shutdown

 Heavy duty, galvanised hose reel with 30m double wire HP hose

D10M-36C-T

• Soft acting, frame mounted by-pass valve

• Stainless steel lance with professional gun

MINE Spec Compliant

• Size: 410 x 185 x 180 (cm)

• Weight: 700kg

MINE SPEC FEATURES:

• Emergency-stop

RANGE Mine Spec.

15 LPM Flow

3000 PSI (3625 PSI pump)

YANMAR DIESEL 10 HP - Electric Start - Cold

BUILT TO

- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Cold 3000 PSI (3625 PSI pump) 15 LPM Flow

Same machine as the D10M-36C-TO with the following differences





Non Mine Spec Versions Available for Both Models

HOT DIESEL 10 HP (MINE SPEC TRAILER)

2 Single Axle Models Available

D10M-36H-TO

ENGINE AND PUMP

- Yanmar 10 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

BOILER / BURNER

- Vertical boiler with $\frac{1}{2}$ " mild steel coils, set to $\frac{70}{\text{C}}$
- Stainless steel fuel tank to boiler (23 litres)

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on 2-ton axle with spare wheel
- Mechanical disc brakes with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 1000 litre, red poly water tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 410 x 185 x 180 (cm)
- Weight: 750kg

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Hot 2600 - 3000 PSI (3625 PSI pump) 15 LPM Flow





MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicatorsWheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

D10M-36H-T

RANGE Mine Spec.

YANMAR DIESEL 10 HP – Electric Start – Hot
2600 - 3000 PSI (3625 PSI pump)
15 LPM Flow

Same machine as the D10M-36H-TO with the following differences

- 1000 litre, white IBC water tank
- Size: 360 x 185 x 180 (cm)
- Weight: 650kg



COLD DIESEL 10 HP (MINE SPEC TRAILER)

2 Double Axle Models Available

RANGE Mine Spec.

15 LPM Flow

3000 PSI (3625 PSI pump)

D10M-36C-TD

ENGINE AND PUMP

- Yanmar 10 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on dual 2.6-ton axles with spare wheel
- Electric disc brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 2000 litre, poly water tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 470 x 187 x 200 (cm)
- Weight: 1,450kg

Emergency-stop

YANMAR DIESEL 10 HP - Electric Start - Cold

BUILT TO

MINE SPEC


- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

D10M-36C-TDP (PLATFORM TRAILER)

RANGE Mine Spec.

YANMAR DIESEL 10 HP - Electric Start - Cold **3000 PSI** (3625 PSI pump) 15 LPM Flow

Same machine as the D10M-36C-TD with the following differences







HOT DIESEL 10 HP (MINE SPEC TRAILER)

2 Double Axle Models Available

D10M-36H-TD

RANGE Mine Spec.

YANMAR DIESEL 10 HP - Electric Start - Hot **2600 - 3000 PSI** (3625 PSI pump) 15 LPM Flow

MINE SPEC

ENGINE AND PUMP

- Yanmar 10 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

BOILER / BURNER

- Vertical boiler with ½" mild steel coils, set to 70°C
- Stainless steel fuel tank to boiler (23 litres)

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on dual 2.6-ton axles with spare wheel
- Electric disc brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 2000 litre, poly water tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 470 x 187 x 200 (cm)
- Weight: 1,500kg

MINE SPEC FEATURES: Emergency-stop

- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicators
- Wheel chocks mounted • Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

D10M-36H-TDP (PLATFORM TRAILER)

RANGE Mine Spec. YANMAR DIESEL 10 HP - Electric Start - Hot 2600 - 3000 PSI (3625 PSI pump) 15 LPM Flow

Same machine as the D10M-36H-TD with the following differences

- Full walk-around platform for high reach cleaning
- Size: 470 x 187 x 300 (cm)
- Weight: 1,600kg





COLD DIESEL 24 HP (MINE SPEC TRAILER)

D24M-50C-TO

ENGINE AND PUMP

- Kohler 24 HP electric start air-cooled diesel engine
- HAWK PXi2135 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on 2-ton axle with spare wheel
- Mechanical disc brakes with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 1000 litre, red poly water tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 410 x 185 x 180 (cm)
- Weight: 750kg

RANGE Mine Spec.

KOHLER DIESEL 24 HP – Electric Start – Cold 4500 - 5000 PSI (5000 PSI pump) 21 LPM Flow



MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle

CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THIS UNIT





HOT DIESEL 24 HP (MINE SPEC TRAILER)

D24M-50H-TD



ENGINE AND PUMP

- Kohler 24 HP electric start air-cooled diesel engine
- HAWK PXi2135 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

BOILER / BURNER

- Vertical boiler with ½" mild steel coils, set to 70°C
- Stainless steel fuel tank to boiler (23 litres)

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on dual 2.6-ton axles with spare wheel
- Electric disc brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 2000 litre, poly water tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Stainless steel lance with professional gun
- MINE Spec Compliant
- Size: 470 x 187 x 200 (cm)
- Weight: 1,550kg

RANGE Mine Spec. KOHLER DIESEL 24 HP – Electric Start – Hot 4500 - 5000 PSI (5000 PSI pump) 21 LPM Flow

MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Double wire insulation
- Anderson type jump-start receptacle

CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THIS UNIT



D24M-50H-TDP (PLATFORM TRAILER)



RANGE Mine Spec.

KOHLER DIESEL 24 HP – Electric Start – Hot
4500 - 5000 PSI (5000 PSI pump)
21 LPM Flow

Same machine as the D24M-50H-TD with the following differences



DIESEL TRAILER & SKID BLASTERS

ELECTRIC WASH-BAY BLASTERS



TYPICAL USERS

- Quarantine Wash-bays
- Heavy Equipment Wash-bays
- Trucking Wash-bays
- Mine Site Wash-bays
- Transport Company Wash-bays
- Car Repair Centers

NOTE:

- All wash-bays should have a WashMate
- The 'Rental Spec' range is designed for a 5 day, 8 hour duty cycle.
- The 'Mine Spec' range is designed for a 7 day, 24 hour duty cycle.



WASHMATE 3R-22C (OLD WASHMATE-10)

MOTOR AND PUMP

- Italian Heavy Duty, class 'H' wound, single-phase electric motor
- HAWK HD1115 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM

• Fully hot dipped galvanised steel frame

SUPPLY AND DELIVERY

- Frame mounted industrial water filter
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- · Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 52 x 47 x 120 (cm)
- Weight: 105kg

MOTOR AND PUMP

RANGE Rental Spec. ELECTRIC 3 HP (2.2kVV) 240 Volt - Cold 1100 - 1200 PSI @ 10 Amp draw **1500 PSI** @ 13 Amp draw 11 LPM Flow - (2200 PSI pump)



RANGE Rental Spec.



WASHMATE 10R-36C (OLD WASHMATE-1)

• Italian Heavy Duty, class 'F' wound, three-phase electric motor

- HAWK NPM1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- LubeBuddy An extra oil tank to keep pump well lubricated
- DOL motor starter, in control box

FRAME

- Fully hot dipped galvanised steel frame
- Vibration mounted control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- · Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Timed by-pass auto shutdown when not in use.
- Soft acting by-pass valve
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Stainless steel lance with professional gun
- Size: 68 x 57 x 150 (cm)
- Weight: 200kg



ELECTRIC 10 HP (7.5kW) 415 Volt - Cold



ELECTRIC WASH-BAY BLASTERS

37

WASHMATE 15R-43C (OLD WASHMATE-3)

RANGE Rental Spec. ELECTRIC 15 HP (11kW) 415 Volt - Cold **3000 PSI** @ 19 Amp draw **18 LPM** Flow – (4350 PSI pump)

MOTOR AND PUMP

- Italian Heavy Duty, class 'F' wound, three-phase electric motor
- HAWK XLT1830 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- LubeBuddy An extra oil tank to keep pump well lubricated
- DOL motor starter, in stainless steel control box

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Timed by-pass auto shutdown when not in use.
- Soft acting by-pass valve
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Stainless steel lance with professional gun
- Size: 68 x 57 x 150 (cm)
- Weight: 230kg





ELECTRIC 10 HP (7.5kW) 415 Volt - **Hot 2800 PSI** @ 13 Amp draw

MOTOR AND PUMP

- Italian Heavy Duty, class 'F' wound, three-phase electric motor
- HAWK NPM1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- LubeBuddy An extra oil tank to keep pump well lubricated
- DOL motor starter, in stainless steel control box

BOILER / BURNER

Horitontal boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Timed by-pass auto shutdown when not in use.
- Soft acting, frame mounted by-pass valve
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Stainless steel lance with professional gun
- Size: 115 x 65 x 150 (cm)
- Weight: 250kg



RANGE Rental Spec.

18 LPM Flow - (3625 PSI pump)







RENTAL SPEC



MOTOR AND PUMP

- WEG Heavy Duty, class 'H' wound, three-phase electric motor
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM

(OLD WASHMATE-5)

- LubeBuddy An extra oil tank to keep pump well lubricated
- Star-Delta soft starter, in stainless steel control box

BOILER / BURNER

• Super heavy duty horizontal boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame
- · Vibration mounted stainless steel control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial dual water filters
- Timed by-pass auto shutdown when not in use.
- Water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Soft acting by-pass valve
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: 120 x 80 x 170 (cm)
- Weight: 550kg

Designed and engineered to work 24/7 in extreme environments

WASHMATE 15M-43C RANGE Mine Spec. ELECTRIC 15 HP (11kW) 415 Volt - Cold (OLD WASHMATE-4) **3400 PSI** @ 19 Amp draw **22 LPM** Flow – (4350 PSI pump)

MOTOR AND PUMP

- WEG Heavy Duty, class 'H' wound, three-phase electric motor
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- LubeBuddy An extra oil tank to keep pump well lubricated
- Star-Delta soft starter, in stainless steel control box

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering

Designed and engineered to work 24/7 in extreme environments

• Timed by-pass auto shutdown when not in use.

WASHMATE 15M-43H

- Soft acting by-pass valve
- Heavy duty, galvanised hose reel with 30m double wire HP hose
- Size: 120 x 80 x 140 (cm)
- Weight: 370kg



RANGE Mine Spec.



MINE SPEC





UNDER BODY WHEEL WASH



TYPICAL USERS

- Weed and Seed Control
- Quarries
- Mine Sites
- Landfill Operations
- Construction Sites



COLD WATER ELECTRIC

WASHMATE 32R-8.5C-WW

MOTOR AND PUMP

- Heavy Duty, class 'F' wound, three-phase electric motor
- Submersible pump and motor unit
- Star-Delta soft starter, in double door control box

FRAME

- Double epoxy coated steel frame
- Low vibration frame rated to 25T per axle
- AS certified lifting lugs

SUPPLY AND DELIVERY


- 12 horizontal mounted nozzles each side at 600mm high
- 12 horizontal mounted nozzles each side at 950mm high
- 48 nozzles from below, cleaning under body
- 96 nozzles in total
- Size: 220 x 510 x 100 (cm) above ground
- Weight: 4000kg

RANGE Rental Spec. ELECTRIC 32 HP (24kVV) 415 Volt 85 PSI @ 40 Amp draw 1000 LPM Flow 20 - 40 SEC Cycle Time



OPTIONAL EXTRAS

- Fully hot dipped galvanised frame.
- Additional shaker grid.
- Steel pit for portable installation.
- Extended spray screens.
- Hydrocyclone solids separator.
- Traffic lights.
- Traffic signs.
- Electronic vehicle sensor to remotely activate the water sprays.
- Emergency stop button.
- Stainless steel control housing.

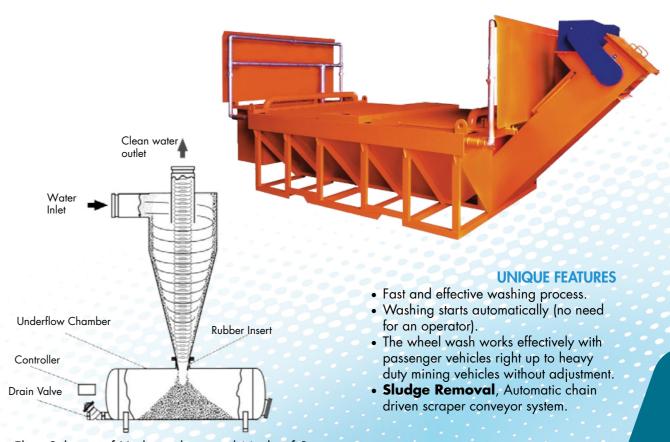

Flow Scheme of Hydrocyclone and Mode of Separation

UNDER BODY WHEEL WASH

ULTRA HIGH PRESSURE BLASTERS



TYPICAL USERS

- Ship Hull Cleaning (Blasting off Barnacles)
- Strip Epoxy Paint Back to Bare Metal
- Concrete Hydro Demolition
- Boiler Tube Cleaning

When ship hull cleaning, this unit is used instead of scraping + blasting with a 5000 PSI machine. It is able to do both jobs in a single pass.



COLD DIESEL 160 HP (MINE SPEC)

D160M-360C

ENGINE AND PUMP

- Finland made Agco Sisu 160 HP electric start water-cooled diesel engine
- Low speed engine at 1800 RPM
- Triplex carbide plunger pump with high tensile stainless steel head
- Extra low speed pump at 580 RPM
- 2 x 43,000 PSI safety rupture disks

FRAME

- Fully hot dipped galvanised frame & powder coated
- Forkliftable + 4 x AS certified lifting lugs
- Engine vibration mounted on separate sub-frame

SUPPLY AND DELIVERY

- Dual stainless steel industrial water filters
- 180 litre water break tank, fitted with low water level auto shutdown
- 20m UHP hose with stainless steel fittings
- Stainless steel lance with 40,000 PSI dump gun
- Ultra impact self-propelled rotating nozzle with 4 Sapphire jets with hydraulic brake
- MINE Spec Compliant
- Size: 225 x 95 x 130 (cm)
- Weight: 2000kg

RANGE Mine Spec. AGCO SISU DIESEL 160 HP – Water Cooled 36,000 PSI (36,000 PSI pump) 25 LPM Flow



MINE SPEC FEATURES:

- Frame mounted water tank with automatic low water level shut down.
- Emergency-Stop
- Exhaust spark arrestor AS1019-2000 certified.
- Engine drip tray
- 2.5kg Fire extinguisher
- High visibility tape
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation on all non-OEM wires
- Anderson type jump-start receptacle
- Designed to meet AS/NZS4233:2

Non Mine Spec Version Also Available



CLASS B SAFETY EQUIPMENT AND TRAINING ARE A REQUIREMENT FOR THIS UNIT



ULTRA HIGH PRESSURE BLASTERS

HYDROSTATIC PORTABLE TESTERS



TYPICAL USERS

- Fire Hose Testing
- Pipe Testing
- Vessel Testing

These units are used where it is a legal or contractual requirement to do pressure testing on installed pipes or vessels.

NOTE:

- Most of our Pressure Testers can also function as Pressure Cleaners.
- Also, all of our Pressure Cleaners can be converted to have this dual function.



E3R-15C-PT HYDROSTATIC TESTER

RANGE Rental Spec. ELECTRIC 3 HP (2.2kW) 240 Volt - Cold **300 PSI** @ 10 Amp draw **50 LPM** Flow – (2175 PSI pump)

MOTOR AND PUMP

- Italian Heavy Duty, class 'H' wound, single-phase electric motor
- HAWK XLT5015 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM

- Fully hot dipped galvanised steel frame
- 4 fire hose testing ports

SUPPLY AND DELIVERY

- · Large industrial water filter
- Can test up to four hoses at once
- Pressure tester manifold with gauge and block valve
- Size: 62 x 52 x 70 (cm)
- Weight: 70kg



P6R-17C-PT HYDROSTATIC TESTER

ENGINE AND PUMP

- Genuine Honda GX200 recoil start engine
- HAWK NHD1215 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

· Fully hot dipped galvanised steel frame

SUPPLY AND DELIVERY

- Frame mounted industrial water filter
- 20m double wire HP hose
- Pressure tester manifold with dual gauges and block
- Adjustable valve (0 PSI 1600 PSI)
- Size: 67 x 61 x 63 (cm)
- Weight: 65kg



RENTAL SPEC



HYDROSTATIC PORTABLE TESTERS

PETROL & DIESEL FIREFIGHTERS



TYPICAL USERS

- Skid Mobile fire fighting, where unit can be fitted on to ute / truck.
- Trailers Where mobility is important, just connect to any ute, truck or SUV.



P6R-1.7-SF D7R-1.7-SF



RANGE Fire Fighting Skid
HONDA PETROL 6.5 HP Class – Recoil Start OR
YANMAR DIESEL 6.7 HP – Electric Start
165 PSI Pump (1135 kPa)
400 LPM Flow

ENGINE AND PUMP

- Genuine Honda GX200 recoil start engine OR YANMAR L70N diesel, electric start engine
- DAVEY Fire Fighting Pump with twin impellers, selfpriming

FRAME

- Fully hot dipped galvanised steel frame, forkliftable
- 1000 litre, white IBC water tank

SUPPLY AND DELIVERY

- 5 meters 1 ½" pool/dam suction hose, with strainer
- Heavy duty, galvanised hose reel with 30m AS Certified fire fighting hose
- Size: 175 x 125 x 140 (cm)
- Weight: 350kg



P6R-1.7-TF D7R-1.7-TF



RANGE Fire Fighting Trailer
HONDA PETROL 6.5 HP Class – Recoil Start OR
YANMAR DIESEL 6.7 HP – Electric Start
165 PSI Pump (1135 kPa)
400 LPM Flow

Same machine as the P6R-1.7-SF & D7R-1.7-SF assembled on a trailer unit

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Mechanical disc brakes with manual hand brake
- Engine vibration mounted on separate sub-frame
- 1000 litre, white IBC water tank

SUPPLY AND DELIVERY

- Size: 360 x 185 x 180 (cm)
- Weight: 600kg

RANGI BUILT TO SINCE 1984 RENTAL SPEC

RANGE Fire Fighting Trailer
HONDA PETROL 6.5 HP Class – Recoil Start OR
YANMAR DIESEL 6.7 HP – Electric Start
165 PSI Pump (1135 kPa)

P6R-1.7-TF0 D7R-1.7-TF0

400 LPM Flow

Same machine as the P6R-1.7-TF & D7R-1.7-TF with the following differences

FRAME

• 1000 litre, red poly water tank

SUPPLY AND DELIVERY

- Size: 410 x 185 x 180 (cm)
- Weight: 700kg



PETROL & DIESEL FIRE FIGHTERS

HOT BOXES



TYPICAL USERS

- Wash-bay users who want to degrease / sanitise with hot water
- Anyone needing to add hot water capabilities to their pressure cleaner
- A heavy duty high pressure boiler, specifically designed for use with our existing high pressure cleaner range (or other pressure cleaners).



AC HOT BOX

BOILER / BURNER


• Vertical boiler with ½" mild steel coils, set to 70°C

RAME

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box
- Stainless steel fuel tank to boiler (23 litres)
- Exhaust canopy (not shown)

SUPPLY AND DELIVERY

- Auto burner shut down controlled via float switch
- Oversized diesel fuel filter
- 2 x 3m connecting hoses with 3/8" M/F fittings
- Size: 80 x 60 x 120 (cm)
- Weight: 150kg





DC HOT BOX

BOILER / BURNER

• Vertical boiler with ½" mild steel coils, set to 70°C

FRAME

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box
- Stainless steel fuel tank to boiler (23 litres)
- Exhaust canopy

SUPPLY AND DELIVERY

- Auto burner shut down controlled via float switch
- Oversized diesel fuel filter
- 2 x 3m connecting hoses with 3/8" M/F fittings
- Size: 80 x 50 x 110 (cm)
- Weight: 150kg

RANGE 12V Diesel Boiler
ELECTRIC 12V Driven, Diesel Fired Burner
4350 PSI Rated Pressure
21 LPM Rated Flow



SPECIALISED BUILDS



TYPICAL USERS

- Drain Cleaners
- Anyone cleaning large surface areas such as driveways, carparks and pathways



JETTING MACHINE

Ideal for cleaning drains

RANGE Rental Spec.

27 LPM Flow

3000-4000 PSI (4350 PSI pump)

P27R-43C

ENGINE AND PUMP

- HAWK XLT2730 Triplex Pump rated at 4350 PSI
- Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

- Fully hot dipped galvanised frame
- Engine vibration mounted on separate sub-frame
- Stainless steel 23 litre fuel tank.
- · Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Heavy duty pressure gauge
- Galvanised hose storage rack with 30m double wire HP Hose
- Size: 125 x 85 x 95 cm
- Weight: 187kg



VANGUARD PETROL 27 HP- Electric Start - Cold



PETROL SURFACE CLEANER

Ideal for cleaning driveways and other large surface areas

P13R-36C-RSC

ENGINE AND PUMP

- HAWK NMT1825 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox

FRAME

- Fully hot dipped galvanised frame
- Stair climbing wheel position (rear).
- Brake castors.
- Fold up handle.
- Hose storage rack.

SUPPLY AND DELIVERY

- Heavy duty pressure gauge
- Galvanized hose storage rack with 10m double wire HP
- Size: 136 x 62 x 89 cm
- Weight: 110kg

RANGE Rental Spec. HONDA PETROL 13 HP Recoil Start - Cold **2600-3000 PSI** (3625 PSI pump) 18 LPM Flow



CUSTOM BUILDS





D24M-43H-TDPBUILT FOR MOOLARBEN COAL

RANGE Mine Spec - Special Build

2 X KOHLER DIESEL 24 HP - Electric Start - Hot

1 X YANMAR DIESEL 6.7hp - Electric Start

3000 - 3600 PSI (4350 PSI pump)

22 LPM Flow

MOTOR AND PUMP

- 2 x D24M-43H-SKID
- Kohler diesel units with super heavy duty horizontal boilers
- HAWK XLT2230 Triplex pump with brass head and ceramic pistons
- 1 x D7R-1.7
- Yanmar L70N diesel electric start engine
- Davey fire fighting pump with twin impellers. self priming
- 1 x Ezyfoamer system

FRAME

- Galvanised heavy duty dual axle trailer
- 2 x High pressure hose and reel, 1 x low pressure fire fighting hose and reel, 1 x Ezyfoamer hose and reel setup
- Heavy Duty canopy with solar panel
- Easy access control panel
- Emergency stop buttons on both sides of the trailer
- Heavy duty toolbox
- 5 stabilising legs and 4 wheel chocks
- Aluminium battery box and batteries for solar panels to power the LED worklights
- 2 x fire extinguishers
- Fold away ladders for easy access up to the platform

SUPPLY AND DELIVERY

- Water supply is from onboard 2000l water tank
- Weight: 3860kg





CUSTOM BUILDS

53

D24M-43C-SKID

MOTOR AND PUMP


- Kohler 24 HP electric start air-cooled diesel engine
- HAWK XLT2230 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frameForklift lifting point welded to the skid frame
- Certified lifting lugs
- Air intake Chalwyn valve installed to shut down engine in case of emergency

SUPPLY AND DELIVERY


- Water supply is via an over-sized industrial water filter to protect the pump from water line debris.
- Stainless steel water break tank with float switch to shut motor down on low water supply - protects pump against cavitation & dry running - extending pump life.
- Heavy duty glycerine filled pressure gauge rated to 10,000 PSI.
- Heavy duty galvanized hose reel (Lockable during travel)
 30m R2 thick wall 3/8" HP Hose Rated to 5000 PSI.
- Hose end sleeved for operator protection.
- Italian made dry gun 900mm insulated stainless steel
- Stainless steel fan nozzle



RANGE Special Build

3000 PSI 22 LPM Flow

KOHLER DIESEL 24 HP

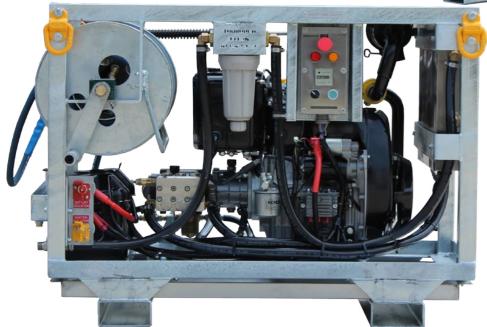

D225-CAT7-TD

RANGE Special Build CAT7 DIESEL - Supplied by customer

MOTOR AND PUMP

- CATERPILLAR CAT7 Diesel engine supplied by customer
- Pioneer PP64C17 Pump supplied by customer

FRAME

- Galvanised heavy duty dual axle trailer
- Heavy duty canopy
- Solar panels on canopy
- 3 x stabilising legs
- Bunded fuel tank
- LED worklights powered from the solar panel located on the roof
- Heavy duty toolbox
- Spare wheel
- Fire extinguisher
- Breakaway system
- High vis tape all round
- Wheel nut indicators





CUSTOM BUILDS

55

D32M-72C-TD **HIGH FLOW COLD WATER CLEANER BUILT FOR NEWCREST MINE**

RANGE Mine Spec PERKINS DIESEL 32 HP Electric Start - Cold **5000 PSI** (7250 PSI pump) 30 LPM Flow

MOTOR AND PUMP

- Perkins 32 HP electric start water-cooled diesel engine
- HAWK HHP30S Triplex Pump with brass head & ceramic
- Extra slow speed pump, belt driven at 1000 RPM
- Extra oil tank to keep pump well lubricated

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer,
- Land Cruiser style wheels on dual 2.6-ton axles with spare
- Electric disc brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- 2 x LED work spot lights & Amber warning light
- Engine vibration mounted on separate sub-frame
- Control box with hour meter & E-stop
- 2200 litre, red poly water tank
- Pintle ring, wind-down legs, tool box, mounted jerry-cans

SUPPLY AND DELIVERY

- Double water intake to pump with extra large dual filters
- Fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- 2 x Heavy duty, galvanised hose reels with 50m double wire HP hose each
- MINE Spec Compliant
- Size: 480 x 187 x 200 (cm)
- Weight: 1,100kg



MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Painted draw bar
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation
- Anderson type jump-start receptacle



E60-4100C **TUNNEL BORER**

RANGE Special Build ELECTRIC 60 HP (45kW) 415 Volt - Cold **4000 PSI** @ 80 Amp draw **80 LPM** Flow - (4100 PSI pump)

MOTOR AND PUMP

- WEG Heavy Duty, Mine Spec, class 'H' wound, three-phase electric motor
- HAWK HFR80 Triplex Pump with brass head & ceramic pistons
- Extra Low speed pump at 1000 RPM
- Extra oil tank to keep pump well lubricated
- Electronic Soft starter, in stainless steel control box


FRAME

- Fully hot dipped galvanised steel frame
- Vibration mounted stainless steel control box with hour meter

SUPPLY AND DELIVERY

- Extra-large industrial water filter
- Pneumatic accumulator to prevent pressure spikes & water
- Timed by-pass auto shutdown when not in use.
- Soft acting by-pass valve
- Heavy duty, galvanised hose reel with 50m double wire HP hose

Size: $144 \times 81 \times 137$ (cm)

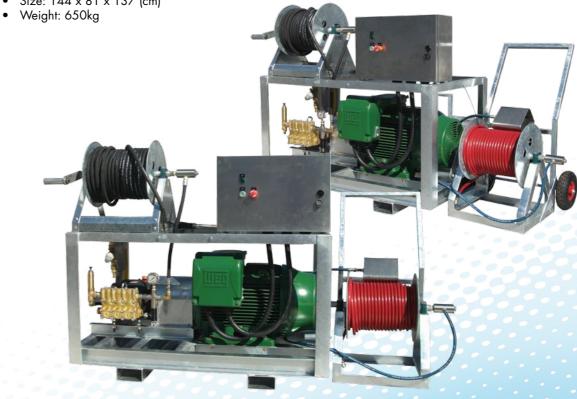

CUSTOM BUILDS

57

RANGE Mine Spec KOHLER DIESEL 10 HP - Electric Start - Hot 3000 PSI (3625 PSI pump) 15 LPM Flow

BUILT TO SINCE 1984

MINE SPEC

MINE SPEC FEATURES:

Exhaust spark arrestor

2kg Fire extinguisher

Wheel nut indicators

Starter motor isolator

Double wire insulation

receptacle

High Vis tape all round

Wheel chocks mounted

Lockable battery isolator

Covered battery terminals

Anderson type jump-start

Emergency-stop

Engine drip tray

Painted draw bar

MOTOR AND PUMP

- Kohler 10.3 HP electric start air-cooled diesel engine
- HAWK NPM1525R Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM with 2:1 gearbox
- Extra oil tank to keep pump well lubricated

BOILER / BURNER

- Vertical boiler with ½" mild steel coils, set to 70°C
- Stainless steel fuel tank to boiler (23 litres)

- Heavy Duty 4x4 style, fully hot dipped galvanised trailer
- Land Cruiser style wheels on dual 2.6-ton axles with spare wheel
- Electric disc brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- 2 x LED work spot lights & Amber warning light
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 2000 litre, poly water tank + 600 litre chemical tank

SUPPLY AND DELIVERY

- Double water intake to pump with dual filters
- Fitted with low water level auto shutdown
- 2 x Heavy duty, galvanised hose reel with 50m double wire HP hose each
- MINE Spec Compliant
- Size: 480 x 187 x 200 (cm)



BUNDED FIRE FIGHTING TRAILER

RANGE Fire Fighting Trailer YANMAR DIESEL 6.7 HP - Electric Start **165 PSI** Pump (1135 kPa) 400 LPM Flow

MOTOR AND PUMP

- YANMAR L70N diesel, electric start engine
- DAVEY Fire Fighting Pump with twin impellers, self-

FRAME

- Heavy Duty 4x4 style, fully hot dipped galvanised
- Fully bunded tank
- Land Cruiser style wheels on dual 2.6-ton axles with spare wheel
- Electric disk brakes with automatic break-away system and with manual hand brake
- LED side clearance lights
- Engine vibration mounted on separate sub-frame
- Stainless steel control box with hour meter & E-stop
- 2000 litre, poly water tank
- Solar battery charger
- · LED working lights and LED warning light

SUPPLY AND DELIVERY

- 5 meters 1½" pool/dam suction hose, with strainer
- Heavy duty, galvanised hose reel with 30m AS Certified fire fighting hose





MINE SPEC FEATURES:

- Emergency-stop
- Exhaust spark arrestor
- Engine drip tray
- 2kg Fire extinguisher
- High Vis tape all round
- Wheel nut indicators
- Wheel chocks mounted
- Lockable battery isolator
- Starter motor isolator
- Covered battery terminals
- Double wire insulation

P20R-43H-SKID **TAMPER PROOF**

RANGE Rental Spec HONDA PETROL 20 HP - Electric Start **3500 PSI** [4350 PSI Pump] 22 LPM Flow



MOTOR AND PUMP

- Genuine Honda GX630 electric start engine
- Close Coupled direct drive via 2:1 gearbox
- HAWK XLT2230 Triplex Pump rated at 4350 PSI max @ 22 LPM.
- The pump is de-rated ** to 3000 3600 PSI to prolong pump life.
- Ceramic sleeved, stainless steel piston plunger rods and brass pump head.
- LubeBuddy An extra oil tank to keep pump well lubricated
- Low speed pump at 1450 RPM

FRAME

- Fully hot dipped galvanised steel frame.
- Stainless steel control box with hour meter & E-stop
- Tamper proof enclosed sheeting around frame to stop unauthorized alterations
- easy access to start/ stop buttoms
- easy access to clean water filters

SUPPLY AND DELIVERY

Heavy duty galvanized hose reel





E30M-72C

RANGE Mine Spec. ELECTRIC 30 HP (22kW) 415 Volt - Cold **7000 PSI** @ 42 Amp draw **15 LPM** Flow – (7250 PSI pump)

59

CUSTOM BUILDS

MOTOR AND PUMP

- Italian Heavy Duty, class 'H' wound, three-phase electric motor
- HAWK PX1550 Triplex Pump with brass head & ceramic pistons
- Low speed pump at 1450 RPM
- Electric soft starter, in stainless steel control box
- Timed shutdown
- LubeBuddy An extra oil tank to keep pump well lubricated

FRAME

- Fully hot dipped galvanised steel frame
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces

SUPPLY AND DELIVERY

- Large frame mounted industrial water filter
- Stainless steel water break tank, fitted with low water level auto shutdown
- Pneumatic accumulator to prevent pressure spikes & water hammering
- Built-in heavy duty, galvanised hose reel with 30m double wire HP hose
- Soft acting, frame mounted by-pass valve
- Thermoshield auto water dump valve
- Stainless steel lance with professional gun
- Size: 125 x 85 x 95 (cm)
- Weight: 270kg



HOSE REELS









THOROUGHCLEAN WATER BLASTERS Over-engineered — On purpose

SMALL HOSE REELS

15M BLACK HOSE REEL

3000 PSI rated, suitable for R1 3/8" non skived hose. (10 m spool)

PRODUCT CODE TRHC3688

50M BLACK HOSE REEL

3000 PSI rated, suitable for 3/8" hose. (20 m spool)

PRODUCT CODE TRHC5180







\$240 +GST

RETRACTABLE HOSE REEL

3000 PSI rated, suitable for 3/8" hose. Automatic retracting hose reel. (15 m spool)

PRODUCT CODE TRHC5181



\$380 +GST

63

BARE REMOTE REELS – STANDARD

4000 PSI WALL MOUNT REEL BARE

With 4000 PSI Reel Swivel, A-Frame & L-Wall Bracket. (50 m spool)

PRODUCT CODE TRHC5020



4000 PSI FLOOR MOUNT REEL BARE

With 4000 PSI Reel Swivel, A-Frame, & Galvanised Stand & bolt-down legs. (50 m spool)

PRODUCT CODE TRHC5022



7000 PSI WALL MOUNT REEL BARE

With 7000 PSI Reel Swivel, A-Frame & L-Wall Bracket. (50 m spool)

PRODUCT CODE TRHC5021



7000 PSI FLOOR MOUNT REEL BARE

With 7000 PSI Reel Swivel, A-Frame, & Galvanised Stand & bolt-down legs. (50 m (loogs

PRODUCT CODE TRHC5023



\$1,125 +GST

COMPLETE REMOTE REELS

4000 PSI WALL MOUNT REEL COMPLETE

With 4000 PSI Reel Swivel, 30m of 5000 PSI hose, 5650 PSI gun swivel, 4000 PSI gun, Stainless Steel Lance & Nozzle + L-Wall Bracket

PRODUCT CODE TRHC5030



4000 PSI FLOOR MOUNT REEL COMPLETE

With 4000 PSI Reel Swivel, 30m of 5000 PSI hose, 5650 PSI hose swivel, 4000 PSI gun, Stainless Steel Lance & Nozzle on a Galvanised stand with bolt-down legs

PRODUCT CODE TRHC5032



PORTABLE HOSE REELS

HOSE REEL TROLLEY

A Galvanised Hose Reel Trolley to suit any of the "Wall Mount" Reels, including bare reels and complete reels with hose lengths up to 120 meters.



SPARE PARTS AND ACCESSORIES







HIGH PRESSURE HOSE

LOW MARKING SKIVED HIGH PRESSURE HOSE

Double Wire Hose with Stainless Steel Crimped Fittings **BRAND** Aüstuv

MAX PRESSURE 5000 PSI MAX TEMPERATURE 120°C HOSE OD 21.5 mm SIZE 3/8" BSP Male & Female Swivel

10 METER HP HOSE	TRHC2068	\$144 +GST
20 METER HP HOSE	TRHC2069	\$248 +GST
30 METER HP HOSE	TRHC2070	\$339 +GST
50 METER HP HOSE	TRHC4610	\$515 +GST

PER METER HP HOSE TRHC0710 \$12 +GST

HOSE FITTINGS \$8 +GST FERRULE 3/8" TRHC1373 **FEMALE 3/8"** TRHC2321 \$30 +GST **MALE 3/8"** TRHC1384 \$15 +GST



FROM \$144 +GST

NON SKIVED HIGH PRESSURE HOSE

Single Wire Hose with Stainless Steel Crimped Fittings **BRAND** Aüstuv

MAX PRESSURE 3000 PSI MAX TEMPERATURE 120°C **HOSE OD** 19.1 mm SIZE 3/8" BSP Male & Female Swivel



10 METER HP HOSE TRHC3458



ROTARY SURFACE CLEANERS

18" POLY ROTARY SURFACE CLEANER

CLEANING SPEED 17 m²/Min DIAMETER 18" (46 cm) **SKIRT** None **ARMS** 2 Arms **WHEELS** Yes MAX PRESSURE 4000 PSI MINIMUM FLOW 11 L/Min **OPTIMAL FLOW 15 L/Min** MAXIMUM FLOW 30 L/Min **MAX TEMPERATURE 82°C** NOZZLES 2 Nozzles, size matched with pressure and flow WEIGHT 14 kg **PRODUCT CODE TRHC0293**



\$998 +GST

67

œ

20" POLY ROTARY SURFACE CLEANER

CLEANING SPEED 20 m²/Min **DIAMETER** 20" (51 cm) **SKIRT** Brush **ARMS** 2 Arms **WHEELS** Optional **MAX PRESSURE** 4000 PSI MINIMUM FLOW 11 L/Min **OPTIMAL FLOW 15 L/Min** MAXIMUM FLOW 30 L/Min **MAX TEMPERATURE 82°C** NOZZLES 2 Nozzles, size matched with pressure and flow WEIGHT 15 kg **PRODUCT CODE TRHC3467**

\$1,079 +GST

22" POLY ROTARY SURFACE CLEANER

CLEANING SPEED 20 m²/Min DIAMETER 22" (56 cm) **SKIRT** Brush **ARMS** 2 Arms **WHEELS** Yes **MAX PRESSURE** 4000 PSI MINIMUM FLOW 11 L/Min **OPTIMAL FLOW 15 L/Min** MAXIMUM FLOW 30 L/Min **MAX TEMPERATURE 82°C** NOZZLES 2 Nozzles, size matched with pressure and flow WEIGHT 17 kg **PRODUCT CODE TRHC0295**



\$1,450 +GST

SPARE PARTS & ACCESSORIES

ROTARY SURFACE CLEANERS

Featured Surface Cleaner

Best value and most popular surface cleaner!

20" STAINLESS STEEL ROTARY SURFACE CLEANER

CLEANING SPEED 28 m²/Min
DIAMETER 20" (51 cm)
SKIRT Brush
ARMS 2 Arms
WHEELS Yes
MAX PRESSURE 4000 PSI
MINIMUM FLOW 11 L/Min
OPTIMAL FLOW 15 L/Min
MAXIMUM FLOW 30 L/Min
MAX TEMPERATURE 82°C
NOZZLES 2 Nozzles, size matched with pressure and flow
WEIGHT 21 kg

PRODUCT CODE TRHC0294

re and flow

\$950 +GST

24" STAINLESS STEEL ROTARY SURFACE CLEANER

CLEANING SPEED 28 m²/Min
DIAMETER 24" (61 cm)
SKIRT Brush
ARMS 3 Arms
WHEELS Yes
MAX PRESSURE 4000 PSI
MINIMUM FLOW 18 L/Min
OPTIMAL FLOW 21 L/Min
MAXIMUM FLOW 30 L/Min
MAX TEMPERATURE 82°C
NOZZLES 3 Nozzles, size matched with pressure and flow
WEIGHT 21 kg
PRODUCT CODE TRHC4430



HIGH PRESSURE GUNS

4000 PSI DRY GUN

MAX PRESSURE 4500 PSI
MAX FLOW 30 L/Min
MAX TEMP 160°C
INLET 3/8" BSP
OUTLET 1/4" BSP
PRODUCT CODE TRHC2729B



\$60 +GST

HAWK BLUE DRY GUN (BALANCED)

MAX PRESSURE 4500 PSI MAX FLOW 40 L/Min MAX TEMP 150°C INLET 3/8" BSP OUTLET 1/4" BSP PRODUCT CODE TRHC0408



\$85 +GST

5650 PSI DRY GUN

MAX PRESSURE 5650 PSI MAX FLOW 30 L/Min MAX TEMP 160°C INLET 3/8" BSP OUTLET 1/4" BSP PRODUCT CODE TRHC5010



\$115 +GST

7250 PSI DRY GUN

MAX PRESSURE 7250 PSI MAX FLOW 30 L/Min MAX TEMP 150°C INLET 3/8" BSP OUTLET 1/4" BSP PRODUCT CODE TRHC4411



\$440 +GST

COMPLETE GUN ASSEMBLY

4000 PSI COMPLETE GUN

4500 PSI Gun, 900mm S/Steel Straight Lance, Nozzle Holder & S/Steel Nozzle*

MAX PRESSURE 4500 PSI MAX FLOW 30 L/Min

MAX TEMP 160°C

INLET 3/8" BSP

OUTLET 1/4" NPT (Nozzle Holder)

*Nozzle size matched with pressure and flow **PRODUCT CODE TRHC4611**



HAWK Blue Dry Gun, 900mm S/Steel Straight Lance, Nozzle Holder & S/Steel Nozzle*

MAX PRESSURE 4500 PSI

MAX FLOW 40 L/Min

MAX TEMP 150°C

INLET 3/8" BSP

OUTLET 1/4" NPT (Nozzle Holder)

*Nozzle size matched with pressure and flow PRODUCT CODE TRHC4612





5650 PSI COMPLETE GUN

5650 PSI Dry Gun, 1200mm S/Steel Straight Lance, Nozzle Holder & S/Steel Nozzle*

MAX PRESSURE 5650 PSI

MAX FLOW 30 L/Min

MAX TEMP 160°C

INLET 3/8" BSP

OUTLET 1/4" NPT (Nozzle Holder)

*Nozzle size matched with pressure and flow **PRODUCT CODE TRHC5011**

7250 PSI COMPLETE GUN

7250 PSI Dry Gun, 1200mm S/Steel Straight Lance, Nozzle Holder & S/Steel Nozzle*

MAX PRESSURE 7250 PSI

MAX FLOW 30 L/Min

MAX TEMP 150°C

INLET 3/8" BSP

OUTLET 1/4" NPT (Nozzle Holder)

*Nozzle size matched with pressure and flow PRODUCT CODE TRHC5006





LANCES

LANCES (WITH ROUND MOULDED GRIP)	MAX PRESS MAX FLOW INLET 1/4" OUTLET 1/4	BSP
Stainless Steel Lance with Moulded Grip, Straight 330mm	TRHC3959	\$21 +GST
Stainless Steel Lance with Moulded Grip, Straight 600mm	TRHC3958	\$25 +GST
Stainless Steel Lance with Moulded Grip, Bent Tip 600mm	TRHC3963	\$25 +GST
Stainless Steel Lance with Moulded Grip, Straight 900mm	TRHC3970	\$49 +GST
Stainless Steel Lance with Moulded Grip, Bent Tip 900mm	TRHC0079	\$49 +GST
Stainless Steel Lance with Moulded Grip, Straight 1200mm	TRHC0080	\$69 +GST
Stainless Steel Lance with Moulded Grip, Bent Tip 1200mm	TRHC3009	\$69 +GST
Stainless Steel Lance with Moulded Grip, Straight 1500mm	TRHC5266	\$95 +GST



Stainless Steel Lance with Moulded Grip, Bent Tip 1500mm

Stainless Steel Lance with Moulded Grip, Straight 2000mm

Stainless Steel Lance with Moulded Grip, Bent Tip 2000mm

FROM **\$21** +GST

\$95 +GST

\$110 +GST

\$110 +GST

HIGH PRESSURE LANCES

INLET 1/4" BSP **OUTLET 1/4" BSP**

TRHC3962

TRHC3961

TRHC5267

Stainless Steel Lance with Moulded Grip, 5800PSI, 1200mm

TRHC4513 \$109 +GST

Stainless Steel Lance with Moulded Grip, 7250 PSI, 900mm TRHC4413 Stainless Steel Lance with Moulded Grip, 7250 PSI, 1200mm TRHC6041



FROM **\$98** +GST

\$98 +GST

\$198 +GST

DOUBLE DETERGENT LANCE

(WITH ROUND MOULDED GRIP)

Stainless Steel Lance with Moulded Grip, Bent Tip 1000mm

MAX PRESSURE 4000 PSI MAX FLOW 40 L/Min INLET 1/4" BSP **OUTLET 1/4" BSP**

TRHC0081



\$98 +GST

NOZZLE SIZE CALCULATOR

											F	low F	late (l	/min)										
	SIZE	bar	60	80	100	120	140	150	160	180	210	220			280	300	320	350	380	400	420	450	480	500
	020	PSI	3.6	4.1	4.6	5.0	5.4	5.6	5.8	6.2	6.7	6.8	34807.1	7.3	7.7	8.0	8.2	8.6	55109.0	9.2	9.4	9.8	10.1	7250 10.3
	025		4.3	5.0	5.6	6.1	6.6	6.9	7.1	7.5	8.1	8.3	8.7	8.9	9.4	9.7	10.0	10.5	10.9	11.2	11.5	11.9	12.3	12.5
I	030		5.3	6.1	6.8	7.4	8.0	8.3	8.6	9.1	9.9	10.1	10.5	10.8	11.4	11.8	12.2	12.7	13.3	13.6	13.9	14.4	14.9	15.2
	035		6.0	7.0	7.8	8.5	9.2	9.6	9.9	10.5	11.3	11.6	12.1	12.3	13.1	13.5	14.0	14.6	15.2	15.6	16.0	16.5	17.1	17.4
	040		7.0	8.1	9.1	10.0	10.8	11.1	11.5	12.2	13.2	13.5	14.1	14.4	15.2	15.8	16.3	17.0	17.7	18.2	18.6	19.3	19.9	20.3
	045		8.0	9.2	10.3	11.3	12.2	12.6	13.0	13.8	14.9	15.3	16.0	16.3	17.2	17.8	18.4	19.3	20.1	20.6	21.1	21.8	22.6	23.0
	050		8.8	10.2	11.4	12.5	13.5	14.0	14.4	15.3	16.5	16.9	17.7	18.0	19.1	19.7	20.4	21.3	22.2	22.8	23.4	24.2	25.0	25.5
	055		9.7	11.2	12.5	13.7	14.8	15.3	15.8	16.8	18.1	18.5	19.4	19.8	20.9	21.7	22.4	23.4	24.4	25.0	25.6	26.5	27.4	28.0
	060		10.6	12.3	13.7	15.0	16.2	16.8	17.3	18.4	19.9	20.3	21.2	21.7	22.9	23.7	24.5	25.6	26.7	27.4	28.1	29.1	30.0	30.6
	065		11.5	13.2	14.8	16.2	17.5	18.1	18.7	19.9	21.4	22.0	22.9	23.4	24.8	25.6	26.5	27.7	28.9	29.6	30.3	31.4	32.4	33.1
	070																						35.1	
ı	075																						37.5	
	080																						39.9	
	085																						42.5	
	100																						50.4	
	105																						52.6	
	110																						54.8	
	120		20.9	24.1	27.0	29.6	31.9	33.1	34.2	36.2	39.1	40.0	41.8	42.7	45.2	46.8	48.3	50.5	52.6	54.0	55.3	57.3	59.2	60.4
	125		21.7	25.0	28.0	30.7	33.1	34.3	35.4	37.6	40.6	41.5	43.4	44.3	46.9	48.5	50.1	52.4	54.6	56.0	57.4	59.4	61.3	62.6
	130		23.2	26.8	30.0	32.9	35.5	36.7	37.9	40.2	43.5	44.5	46.5	47.4	50.2	52.0	53.7	56.1	58.5	60.0	61.5	63.6	65.7	67.1
	150		26.3	30.4	34.0	37.2	40.2	41.6	43.0	45.6	49.3	50.4	52.7	53.8	56.9	58.9	60.8	63.6	66.3	68.0	69.7	72.1	74.5	76.0
	200		35.6	41.1	46.0	50.4	54.4	56.3	58.2	61.7	66.7	68.2	71.3	72.7	77.0	79.7	82.3	86.1	89.7	92.0	94.3	97.6	100.8	102.9
	250		44.2	51.0	57.0	62.4	67.4	69.8	72.1	76.5	82.6	84.5	88.3	90.1	95.4	98.7	102.0	106.6	111.1	114.0	116.8	120.9	124.9	127.5
	300		52.7	60.8	68.0	74.5	80.5	83.3	86.0	91.2	98.5	100.9	105.3	107.5	113.8	117.8	121.6	127.2	132.6	136.0	139.4	144.2	149.0	152.1

HOW TO FIND THE CORRECT NOZZLE SIZE

- 1) Find the closest pressure (in PSI or BAR) to your machine's set up pressure
- 2) Go vertically down the column to find the closest flow (in litres / min) to your machine
- 3) Go horizontally across to determine the nozzle size

Eg: A machine running at 3000 PSI and 15 LPM would use a 045 nozzle

SPRAY NOZZLES / JETS

O° FAN (PENCIL JET) STAINLESS STEEL NOZZLES - ¼" NPT

JET SIZE	PART NUMBER:
00020	TRHC2356
00030	TRHC2357
00040	TRHC2358
00045	TRHC5323
00060	TRHC2359
00065	TRHC2360
00070	TRHC2361
00075	TRHC2362
08000	TRHC2363
00090	TRHC2364
00100	TRHC2347
00130	TRHC2348



73

15° FAN (FAN JET) STAINLESS STEEL NOZZLES - 1/4" NPT

JET SIZE 15010 15030 15035 15040 15045 15050 15055 15060 15065 15070 15075 15080 15085 15090 15100 15105 15110 15120	PART NUMBER: TRHC0322 TRHC0323 TRHC4554 TRHC0324 TRHC0326 TRHC0327 TRHC0328 TRHC0329 TRHC2323 TRHC2323 TRHC0330 TRHC2324 TRHC0331 TRHC2333 TRHC0332 TRHC2325 TRHC2325 TRHC2325 TRHC2326 TRHC2337
15090	TRHC0332
15105	TRHC2335
15130 15150	TRHC2339 TRHC2340
15200 15250 15300	TRHC2341 TRHC2350 TRHC2342



ALL AT **\$15** +GST

SPRAY NOZZLES / JETS

25° FAN (FAN JET) STAINLESS STEEL NOZZLES - 1/4" NPT

JET SIZE: PART NUMBER: 25015 TRHC2353 TRHC0312 25025 TRHC0313 25030 TRHC2327 25045 TRHC4408



40° FAN (FAN JET) STAINLESS STEEL NOZZLES - 1/4" NPT

JET SIZE: PART NUMBER: 40030 TRHC2351




DETERGENT NOZZLE BRASS - 1/4" NPT

JET SIZE: PART NUMBER: 05040 TRHC2718



ALL AT **\$15** +GST



0° PENCIL JETCutting nozzle. It delivers a concentrated stream that can gouge

or cut stubborn stains

from concrete and other



15° FAN / CHISEL JET Chiseling nozzle.

Working at a 45° angle, this nozzle works like a scraper, stripping paint, grease and grime from hard surfaces.



25° & 40° FAN / WASH JET

Wash nozzle. Its wide spray allows you to wash and rinse a large area fast. It is usually safe with most surfaces, including aluminium sliding, windows and vehicles.

TURBO NOZZLES / ROTO JETS + REPAIR KITS

255 BAR (3700 PSI) TURBO NOZZLES

(All w	rith ¼" BSP Inlet	·)	Repair Kits			
Size:	Part Number:	Price:	Size:	Part Number:	Price:	
035	TRHC5694	\$120 +GST	035	TRHC5739	\$69 +GST	
040	TRHC5715	\$120 +GST	040	TRHC5740	\$69 +GST	
045	TRHC4364	\$120 +GST	045	TRHC2782	\$69 +GST	
050	TRHC4987	\$120 +GST	050	TRHC2786	\$69 +GST	
055	TRHC2747	\$120 +GST	055	TRHC2783	\$69 +GST	
060	TRHC0083	\$120 +GST	060	TRHC0086	\$69 +GST	
065	TRHC2748	\$120 +GST	065	TRHC2784	\$69 +GST	
070	TRHC2749	\$120 +GST	070	TRHC2785	\$69 +GST	





75

360 BAR (5250 PSI) TURBO NOZZLES S/STEEL

(All with ¼" BSP Inlet)				Repair Kits				
	Size:	Part Number:	Price:	Size:	Part Number:	Price:		
	030	TRHC4523	\$280 +GST	030	TRHC5039	\$69 +GST		
	040	TRHC5038	\$280 +GST	040	TRHC5040	\$69 +GST		
	050	TRHC4277	\$280 +GST	050	TRHC5041	\$69 +GST		
	060	TRHC4278	\$280 +GST	060	TRHC5042	\$69 +GST		
	070	TRHC4279	\$280 +GST	070	TRHC5043	\$69 +GST		





400 BAR (5800 PSI) TURBO NOZZLES

(All w	vith ¼" BSP Inlet)	Repai	r Kits	
Size:	Part Number:	Price:	Size:	Part Number:	Price:
045	TRHC5317	\$240 +GST	045	TRHC5387	\$89 +GST
050	TRHC5218	\$240 +GST	050	TRHC5388	\$89 +GST
055	TRHC5319	\$240 +GST	055	TRHC5389	\$89 +GST
060	TRHC5320	\$240 +GST	060	TRHC5390	\$89 +GST
065	TRHC5321	\$240 +GST	065	TRHC5391	\$89 +GST
070	TRHC5322	\$240 +GST	070	TRHC5392	\$89 +GST
075	TRHC2742	\$240 +GST	075	TRHC5013	\$89 +GST
090	TRHC2744	\$240 +GST	090	TRHC5014	\$89 +GST
100	TRHC2745	\$240 +GST	100	TRHC5015	\$89 +GST





\$89 +GST

PHONE: 07 5467 2025 SPARE PARTS & ACCESSORIES

hard surfaces.

LANCE NOZZLE HOLDERS

1/4" BSP/NPT STAINLESS STEEL NOZZLE HOLDER

MAX PRESSURE 5000 PSI
PRODUCT CODE TRHC2302



\$12 +GST

1/4" BSP/NPT STAINLESS STEEL NOZZLE HOLDER

MAX PRESSURE 7250 PSI
PRODUCT CODE TRHC5052 ▼



\$19 +GST

1/4" BSP/NPT ADJUSTABLE NOZZLE HOLDER 'ROSE HEAD'

To hand adjust from high pressure cleaning to low pressure cleaning, rinsing or detergent/foam application using a chemical/detergent injector.

MAX PRESSURE 4050 PSI MAX FLOW 30 L/Min PRODUCT CODE TRHC0387



\$55 +GST

1/4" BSP/NPT STAINLESS STEEL SWIVEL NOZZLE HOLDER

Change spray direction quickly and easily to get into gutters or other hard to reach places.

MAX PRESSURE 4500 PSI PRODUCT CODE TRHC4394



\$79 +GST

TELESCOPIC LANCES

FIBERGLASS TELESCOPIC LANCE

Max Pressure 4000 PSI Max Flow 30 L/Min Max Temperature 90°C Inlet 1/4" BSP Outlet 1/4" BSP

LengthProduct CodePriceFiberglass Telescopic Lance 2m x 5.5mTRHC4245\$278 +GSTFiberglass Telescopic Lance 2.7m x 7.3mTRHC5204\$322 +GST



ALUMINIUM TELESCOPIC LANCE

Max Pressure 4000 PSI Max Flow 30 L/Min Max Temperature 90°C Inlet 1/4" BSP Outlet 1/4" BSP

LengthProduct CodePriceAluminium Telescopic Lance 2m x 5.5mTRHC5741\$409 +GSTAluminium Telescopic Lance 2.7m x 7.3mTRHC5205\$499 +GST



TELESCOPIC LANCE ACCESSORIES

ProductProduct CodePriceTelescopic Lance Front ExtensionTRHC5207\$23 +GSTTelescopic Lance Gutter CleanerTRHC5206\$32 +GSTTelescopic Lance Belt KitTRHC4246\$39 +GST







Gutter Cleaner

FROM **\$23** +GST

LANCE ATTACHMENTS

ADJUSTABLE DETERGENT INJECTOR **LOW PRESSURE VENTURI**

Mount downstream of pump and use the venturi effect to draw up to 20% chemical into the spray hose when the HP pressure is reduced.

Max Pressure 4060 PSI

Product Code	Inlet	Ou	tlet	Size	Pump Fl	ow
TRHC5221	3/8" BSP /	Male 3/8	8" BSP Femo	ale 1.8	8 – 12 LP	M
TRHC5068	3/8" BSP /	Male 3/8	8" BSP Femo	ale 2.1	10 – 15 L	PM
TRHC5069	3/8" BSP /	Male 3/8	" BSP Femo	ale 2.3	12 – 18 L	PM



\$38 +GST

SUCTION HOSE AND FILTER

Attaches to adjustable detergent injector

PRODUCT CODE TRHC4692 ▼



\$8 +GST

ADJUSTABLE DETERGENT FOAMER & 1L TANK

Mount on front of the lance and use the venturi effect to draw detergent into the foamer to aerate the detergent.

Max Pressure 2900 PSI **Product Code**

TRHC3277

Max Flow 25LPM / 60 Deg Inlet Size 2.1mm 1/4" BSP Female



\$165 +GST

ADJUSTABLE DETERGENT FOAMER & INJECTOR

Mount on front of the lance and use the venturi effect to draw detergent into the foamer to aerate the detergent. Injector mounted at pump.



\$189 +GST

BY-PASS (UNLOADER) VALVES

K7-1 BY-PASS VALVE

Soft Acting Valve **MAX PRESSURE** 3000 PSI MAX FLOW 11 - 16 L/Min **MAX TEMPERATURE** 60°C **PRODUCT CODE TRHC1465**



K7 REPAIR KIT

PRODUCT CODE TRHC0513 PRICE \$139 +GST

\$180 +GST

K7-2 BY-PASS VALVE

Soft Acting Valve **MAX PRESSURE** 3000 PSI MAX FLOW 16 - 25 L/Min MAX TEMPERATURE 60°C **PRODUCT CODE TRHC1466**



K7 REPAIR KIT

PRODUCT CODE TRHC0513 PRICE \$139 +GST

K1 BY-PASS VALVE

Soft Acting Valve MAX PRESSURE 3600 PSI MAX FLOW 9 - 41 L/Min **MAX TEMPERATURE** 60°C **PRODUCT CODE TRHC1464**



K1 REPAIR KIT

PRODUCT CODE TRHC2918 PRICE \$120 +GST

\$140 +GST

FOR A DETAILED TUTORIAL ON HOW TO ADJUST YOUR BYPASS VALVE PLEASE VISIT OUR YOUTUBE CHANNEL

THOROUGHCLEAN - ADJUSTING K7 BYPASS VALVE TUTORIAL

BY-PASS (UNLOADER) VALVES

PULSAR ZERO BY-PASS VALVE

Soft Acting Valve **MAX PRESSURE** 3650 PSI MAX FLOW 9 - 40 L/Min MAX TEMPERATURE 90°C **PRODUCT CODE TRHC3136**



PULSAR REPAIR KIT

PRODUCT CODE TRHC5516 PRICE \$74 +GST

VB80/280 ZERO BY-PASS VALVE

Soft Acting Valve MAX PRESSURE 4500 PSI MAX FLOW 80 L/Min **MAX TEMPERATURE 90°C PRODUCT CODE TRHC3137**



VB80/280 REPAIR KIT

PRODUCT CODE TRHC5515 PRICE \$215 +GST

VB80/400 BYPASS VALVE

Non Soft Acting Valve MAX PRESSURE 5800 PSI MAX FLOW 80 L/Min **MAX TEMPERATURE 90°C PRODUCT CODE TRHC3314**



VB80/400 REPAIR KIT

PRODUCT CODE TRHC3312 PRICE \$92 +GST

\$755 +GST

VB60/600 ZERO STAINLESS BY-PASS VALVE

Soft Acting Valve MAX PRESSURE 8700 PSI MAX FLOW 60 L/Min **MAX TEMPERATURE 90°C PRODUCT CODE TRHC5016**



VB60 REPAIR KIT

PRODUCT CODE TRHC5508 PRICE \$290 +GST

SAFETY VALVES

VS240 SAFETY VALVE

PRESSURE RATING 3500 PSI MAX PRESSURE 4200 PSI MAX FLOW 24 L/Min MAX TEMPERATURE 60°C INLET 3/8" BSP M **PRODUCT CODE TRHC5200**



\$49 +GST

81

VS350 SAFETY VALVE

PRESSURE RATING 5100 PSI MAX PRESSURE 5650 PSI MAX FLOW 25 L/Min **MAX TEMPERATURE 90°C** INLET 3/8" BSP F **PRODUCT CODE** TRHC2972



\$105 +GST

VS500 SAFETY VALVE

PRESSURE RATING 7250 PSI **MAX PRESSURE** 8100 PSI MAX FLOW 80 L/Min **MAX TEMPERATURE 90°C** INLET 1/2" BSP F **PRODUCT CODE TRHC4412**



VS500 REPAIR KIT

PRODUCT CODE TRHC5491 PRICE \$195 +GST

\$425 +GST

HOSE & REEL SWIVELS

STRAIGHT HOSE SWIVEL BRASS

MAX PRESSURE 3200 PSI 3/8" M/F Hose Swivel – Stainless Steel

PRODUCT CODE TRHC0382



MAX PRESSURE 5650 PSI 3/8" M/F Hose Swivel – Stainless Steel

PRODUCT CODE TRHC0430





\$33 +GST

\$79 +GST

90° REEL SWIVEL STAINLESS STEEL

MAX PRESSURE 4100 PSI 3/8" M/F Reel Swivel - Stainless Steel

PRODUCT CODE TRHC0006



REPAIR KIT
PRODUCT CODE TRHC2827
PRICE \$25 +GST

\$86 +GST

90° REEL SWIVEL STAINLESS STEEL

MAX PRESSURE 7000 PSI 1/2" M/F Reel Swivel – Stainless Steel

PRODUCT CODE TRHC1888



REPAIR KIT
PRODUCT CODE TRHC5199
PRICE \$64 +GST

\$320 +GST

QUICK CONNECT FITTINGS

All quick connect fittings on this page have the following specs

MAX PRESSURE 4060 PSI

MAX FLOW 40 L/Min

MAX TEMP 150°C

83

QUICK CONNECT COUPLING - 1/4" BSP MALE

PRODUCT CODE TRHC5183



\$20 +GST

QUICK CONNECT NIPPLE - 1/4" BSP MALE

PRODUCT CODE TRHC2717



\$11 +GST

QUICK CONNECT NIPPLE - 1/4" NPT FEMALE

PRODUCT CODE TRHC5250



\$11 +GST

QUICK CONNECT NIPPLE - 3/8" BSP MALE

PRODUCT CODE TRHC2799



\$11 +GST

QUICK CONNECT COUPLING - 1/4" BSP FEMALE

PRODUCT CODE TRHC2798



\$20 +GST

QUICK CONNECT NIPPLE - 1/4" BSP FEMALE

PRODUCT CODE TRHC5184



\$11 +GST

QUICK CONNECT COUPLING - 3/8" BSP FEMALE

PRODUCT CODE TRHC2809



\$28 +GST

QUICK CONNECT NIPPLE - 3/8" BSP FEMALE

PRODUCT CODE TRHC2716



\$11 +GST

QUICK CONNECT FITTINGS

M22 COUPLING - 1/4" BSP FEMALE

MAX PRESSURE 4060 PSI MAX FLOW 40 L/Min MAX TEMP 150°C PRODUCT CODE TRHC5701



\$20 +GST

M22 COUPLING - 3/8" BSP FEMALE

MAX PRESSURE 4060 PSI MAX FLOW 40 L/Min MAX TEMP 150°C PRODUCT CODE TRHC5645



\$20 +GST

M22 COUPLING - 3/8" BSP MALE

MAX PRESSURE 4060 PSI MAX FLOW 40 L/Min MAX TEMP 150°C PRODUCT CODE TRHC3428



These fit together as a pair

\$20 +GST

M22 NIPPLE - 1/4" BSP FEMALE

MAX PRESSURE 4060 PSI
MAX FLOW 40 L/Min
MAX TEMP 150°C
PRODUCT CODE TRHC2800



\$13 +GST

M22 NIPPLE - 3/8" BSP FEMALE

MAX PRESSURE 4060 PSI MAX FLOW 40 L/Min MAX TEMP 150°C PRODUCT CODE TRHC5814



\$13 +GST

M22 NIPPLE - 3/8" BSP MALE

MAX PRESSURE 4060 PSI MAX FLOW 40 L/Min MAX TEMP 90°C PRODUCT CODE TRHC3252



\$13 +GST

QUICK CONNECT FITTINGS

1/4" KEW COUPLING

MAX PRESSURE 3650 PSI MAX FLOW 40 L/Min MAX TEMP 90°C PRODUCT CODE TRHC0090



1/4" KEW NIPPLE

MAX PRESSURE 3650 PSI MAX FLOW 40 L/Min MAX TEMP 90°C PRODUCT CODE TRHC0020



These fit together as a pair

\$38 +GST

\$24 +GST

85

1/2" COUPLING - 3/8" BSP FEMALE

MAX PRESSURE 5075 PSI
MAX FLOW 40 L/Min
MAX TEMP 150°C
PRODUCT CODE TRHC5346 ▼



1/2" NIPPLE - 3/8" BSP FEMALE

MAX PRESSURE 5075 PSI
MAX FLOW 40 L/Min
MAX TEMP 150°C
PRODUCT CODE TRHC5347 ▼



These fit together as a pair

\$69 +GST

\$31 +GST

M22 NIPPLE - 1/4" BSP FEMALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5290



\$30 +GST

M22 NIPPLE - 1/4" BSP MALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5287



\$30 +GST

QUICK CONNECT FITTINGS

M22 NIPPLE - 3/8" BSP FEMALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5291



\$30 +GST

M22 COUPLING - 1/4" BSP FEMALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5283



\$50 +GST

M22 COUPLING - 3/8" BSP FEMALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5284



\$50 +GST

M22 NIPPLE - 3/8" BSP MALE

MAX PRESSURE 7250 PSI
MAX FLOW 40 L/Min
MAX TEMP 160°C
PRODUCT CODE TRHC5288



\$30 +GST

M22 COUPLING - 1/4" BSP MALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5286



\$50 +GST

M22 COUPLING - 3/8" BSP MALE

MAX PRESSURE 7250 PSI MAX FLOW 40 L/Min MAX TEMP 160°C PRODUCT CODE TRHC5285



\$50 +GST

BSP HIGH PRESSURE FITTINGS

HIGH PRESSURE ELBOWS

Material Brass	Max Pressure 4350	O PSI
Size	Product Code	Price
1/4" Male x 1/4" Female	TRHC3401	\$11 +GST
3/8" Male x 1/4" Female	TRHC3402	\$12 +GST
3/8" Female x 3/8" Female	TRHC3302	\$11 +GST
3/8" Male x 3/8" Female	TRHC3400	\$11 +GST
3/8" Male x 3/8" Male	TRHC3403	\$12 +GST
1/2" Male x 1/2" Female	TRHC3408	\$14 +GST







Female x Male

Female x Female

Male x Male

FROM **\$11** +GST

HIGH PRESSURE ADAPTERS

Material Brass Size

3/8" Female x 3/8" Male Tapered

Max Pressure 4350 PSI Product Code TRHC4666



\$14 +GST

HIGH PRESSURE NIPPLES

Material Stainless Steel
Size
3/8" Male x 3/8" Male Tapered
3/8" Male x 3/8" Male Parallel

 Max Pressure
 5000 PSI

 Product Code
 Price

 TRHC3145
 \$10 +GST

 TRHC3306
 \$10 +GST



\$10 +GST

BSP HIGH PRESSURE FITTINGS

HIGH PRESSURE TEES

Material Brass	Max Pressure 435	O PSI
Size	Product Code	Price
3/8" Male x 3/8" Male x 1/4" Female	TRHC3404	\$12 +GST
3/8" Female x 3/8" Female x 3/8" Female	TRHC3405	\$12 +GST
3/8" Female x 3/8" Female x 3/8" Male	TRHC3407	\$12 +GST
1/2" Female x 1/2" Female x 1/2" Female	TRHC3406	\$16 +GST







Male x Male x Female Female x Female x Female

Female x Female x Male

FROM **\$12** +GST

HIGH PRESSURE SOLID PLUGS

Material Brass	Max Pressure 4350 F	PSI
Size	Product Code	Price
1/8" Solid Brass Plug	TRHC0058	\$6 +GST
3/8" Solid Brass Plug	TRHC0060	\$8 +GST
3/4" Solid Brass Plug	TRHC0063	\$11 +GST







FROM **\$6** +GST

STAINLESS STEEL HOSE CLAMPS

STANDARD CLAMP

This high grade stainless clamp is a heavy duty clamp that features a firm band and as it is the ideal fastener for connection of hoses and pipes, it is suitable for equipping in automobiles, trucks and other heavy duty equipment. These are the same clamps used within our own machines. All are non-perforated so they won't cut

Internal finish No	n-Perforated	Band Material 3	04 Stainless Steel
Diameter Range	Band Width	Product Code	Price
12 - 22mm	9mm	TRHC0555	\$1.10 +GST
16 - 27mm	12mm	TRHC0558	\$1.60 +GST
20 - 32mm	12mm	TRHC2260	\$1.90 +GST
50 - 70mm	12mm	TRHC2263	\$2.50 +GST



FROM **\$1.10** +GST

SUPER / POWER CLAMP

The power clamp is a heavy duty clamp with rolled-up band edges to provide extra strength. These are the same clamps used within our own machines. All are non-perforated so they won't cut into the hose.

Internal finish Nor	n-Perforated	Band Material 304 Stainless Steel			
Diameter Range	Band Width	Screw	Product Code	Price	
32 - 35mm	20mm	M6x50	TRHC1712	\$5.60 +GST	
40 - 43mm	20mm	M6x50	TRHC1713	\$6.30 +GST	
92 - 97mm	24mm	M8x70	TRHC1719	\$11.20 +GST	
98 - 103mm	24mm	M8x70	TRHC0283	\$11.40 +GST	



89

SPARE PARTS & ACCESSORIES

FROM **\$5.60** +GST

P-CLIP

P-Clips provide a secure method of mounting cables and looms. These are the same clamps used within our own machines. They all include a soft rubber insert to protect the cables and tubes.

Internal finish Prof	ective Rubber	Band Material 304	Price \$1.45 +GST \$1.50 +GST \$1.65 +GST \$1.70 +GST \$1.85 +GST \$1.95 +GST \$2.05 +GST		
Diameter	Band Width	Product Code	Price		
6mm	15mm	TRHC2271	\$1.45 +GST		
8mm	15mm	TRHC0257	\$1.50 +GST		
10mm	15mm	TRHC0259	\$1.65 +GST		
12mm	15mm	TRHC2272	\$1.70 +GST		
14mm	15mm	TRHC0264	\$1.85 +GST		
16mm	15mm	TRHC0266	\$1.95 +GST		
20mm	15mm	TRHC0271	\$2.05 +GST		
22mm	15mm	TRHC0273	\$2.15 +GST		
25mm	15mm	TRHC0275	\$2.30 +GST		
30mm	15mm	TRHC0276	\$2.40 +GST		
35mm	15mm	TRHC0277	\$2.60 +GST		



FROM **\$1.45** +GST

SPARE PARTS & ACCESSORIES

WATER FILTERS & REPLACEMENT MESH

34" BLACK INDUSTRIAL WATER FILTER

With Stainless Steel Mesh – 50 Mesh (297 Micron)

MAX FLOW 50 L/Min

PRODUCT CODE TRHC2812



\$30 +GST

REPLACEMENT STAINLESS STEEL MESH TUBE

3/4" Blue Mesh Tube – 50 Mesh (297 Microns)

MAX FLOW 50 L/Min

PRODUCT CODE TRHC3479



\$12 +GST

1¼" LARGE CAPACITY INDUSTRIAL WATER FILTER

With Stainless Steel Mesh – 80 Mesh (177 Micron)
MAX FLOW 132 L/Min
MAX TEMP 90°C
PRODUCT CODE TRHC1033



REPLACEMENT STAINLESS STEEL MESH TUBE

11/4" Red Mesh Tube – 60 Mesh (250 Microns)

MAX FLOW 132 L/Min

PRODUCT CODE TRHC2397



\$60 +GST

REPLACEMENT STAINLESS STEEL MESH TUBE

11/4" Yellow Mesh Tube – 80 Mesh (177 Microns)

MAX FLOW 132 L/Min

PRODUCT CODE TRHC2396



FLOAT SWITCHES

BRASS FLOAT

1/2" Black Brass Float Valve Complete PRODUCT CODE TRHC0456



\$88 +GST

REPAIR KIT

Pin

PRODUCT CODE TRHC3297 \$25 +GST

Seal

PRODUCT CODE TRHC0458 **\$5** +GST

Seat

PRODUCT CODE TRHC0457 \$5 +GST

BRASS FLOAT

34" Grey Brass Float Valve Complete PRODUCT CODE TRHC3292



\$87 +GST

REPAIR KIT

PRODUCT CODE TRHC2870
PRICE \$8 +GST

FLOAT SWITCH 1/2" NPT FUEL/OIL/WATER

PRODUCT CODE TRHC1294



FLOAT SWITCH
1/2" COMPRESSION FIT
FUEL/OIL/WATER

PRODUCT CODE TRHC1292



DEUTSCH CONNECTOR KIT

PRODUCT CODE TRHC1184




PHONE: 07 5467 2025

SPARE PARTS & ACCESSORIES

ELECTRICAL SPARES

ROTARY START SWITCH


PRODUCT CODE TRHC1156



\$30 +GST

PUSH START BUTTON

PRODUCT CODE TRHC1142



\$25 +GST

GREEN LED LIGHT

12V

PRODUCT CODE: TRHC4576

24V

PRODUCT CODE: TRHC2958



EMERGENCY STOP PUSH BUTTON

PRODUCT CODE TRHC1152



PUSH STOP BUTTON

PRODUCT CODE TRHC3078



\$25 +GST

RED LED LIGHT

12V

PRODUCT CODE TRHC4575

24V

PRODUCT CODE TRHC2957



ELECTRICAL SPARES

TRAILER TAIL LIGHT LED STOP LIGHT/INDICATOR

PRODUCT CODE TRHC0900

TRAILER TAIL LIGHT LED
STOP LIGHT/INDICATOR /
NUMBER PLATE LIGHT

PRODUCT CODE TRHC0901





\$60 +GST

\$65 +GST

REMOTE SWITCHES

REMOTE SWITCHES IN STAINLESS STEEL BOX

24 Volt – for controlling wash bay units from a distance. Can be fitted to Remote Reel frame or be wall mounted. Has fault indicator lights & boiler control if applicable. Includes 20 meters of electrical cable to pressure cleaner.

PRODUCT CODE TRHC5012



\$450 +GST

WHIPSOCK ARE A REQUIREMENT FOR CLASS B AND UHP MACHINES

CLASS A AND CLASS B CHART CAN BE FOUND ON PAGE 4

WHIPSOCK FITS 8-14MM HOSE

LENGTH 400MM PRODUCT CODE TRHC6003 ▼



\$100 +GST

WHIPSOCK FITS 20-30MM HOSE

LENGTH 600MM PRODUCT CODE TRHC6023 ▼



\$110 +GST

WHIPSOCK COVER/SOCK

LENGTH 750MM PRODUCT CODE TRHC6025 ▼



\$289 +GST

SPARE PARTS

ACCUMULATOR 0.35L (PULSATION DAMPENER)

INPUT 3/8" BSP Male MAX TEMP 85°C

3040 PSI

5000 PSI

PRODUCT CODE **MAX PRESS.** TRHC0453 \$188 TRHC5226 \$695

FROM **\$188** +GST

FLOW SWITCH STAINLESS STEEL

MAX PRESSURE 7300 PSI INPUT / OUTPUT 3/8" BSP Female MAX FLOW 60 LPM MAX TEMP 75°C PRODUCT CODE TRHC0442

\$190 +GST

DIESEL FILTER COMPLETE FILTER WITH GLASS BOWL

MAX FLOW 45 LPM **PRODUCT CODE TRHC0608**▼

\$85 +GST

DIESEL FILTER FILTER ELEMENT ONLY

PRODUCT CODE TRHC3954▼

\$16 +GST

THERMOSHIELD (PROTECT PUMP FROM **OVERHEATING**)

MAX PRESSURE 145 PSI MAX TEMP 60°C PRODUCT CODE **INPUT** TRHC0092 3/8" BSP Male TRHC2810 1/2" BSP Male



\$42 +GST

PRESSURE SWITCH **STAINLESS STEEL**

MAX PRESSURE 8600 PSI INPUT 3/8" BSP Male MAX TEMP 90°C **PRODUCT CODE TRHC2889**



\$120 +GST

PRESSURE GAUGE **63MM, STAINLESS STEEL**

MAX PRESSURE 10,000 PSI INPUT 1/4" BSP Male **PRODUCT CODE TRHC3743**



\$38 +GST

THERMOSTAT

MAX TEMP 160°C **VOLTAGE 240V PRODUCT CODE TRHC0201**



\$60 +GST

BOILERS

NT130 HORIZONTAL BOILER 240V AC - COMPLETE

MAX PRESSURE 5,000 PSI MAX FLOW 18 LPM MAX TEMP 90°C **PRODUCT CODE** TRHC0582



\$4,480 +GST

SPARE PARTS

BOILER COIL - STEEL PRODUCT CODE TRHC0583 PRICE \$1980 +GST



IGNITION ELECTRODES (NEED A PAIR PER BOILER) **PRODUCT CODE TRHC053**1

PRICE \$15 +GST

PRICE \$1380 +GST

FAN BURNER - 240V AC COMPLETE PRODUCT CODE TRHC3760



MOTOR FAN - 240V AC 110W PRODUCT CODE TRHC4232 PRICE \$208 +GST



FAN BLADE PRODUCT CODE TRHC3462 PRICE \$21 +GST



IGNITION TRANSFORMER COIL 240V AC

PRODUCT CODE TRHC0197 PRICE \$150 +GST



FUEL 1.25 NOZZLE TRHC3508 **FUEL 1.35 NOZZLE FUEL 1.5 NOZZLE** TRHC0373 **FUEL 1.75 NOZZLE** TRHC0378 **FUEL 2.0 NOZZLE** TRHC3509 PRICE \$45 +GST



FUEL PUMP PRODUCT CODE TRHC0530 PRICE \$240 +GST



FUEL SOLENOID - 240V AC PRODUCT CODE TRHC0195 PRICE \$51 +GST



INSULATION GASKET - SMALL PRODUCT CODE TRHC3756 PRICE \$21 +GST



INSULATION GASKET - LARGE PRODUCT CODE TRHC3759 PRICE \$110 +GST



BOILERS

NT130 HORIZONTAL BOILER 12V DC - COMPLETE

MAX PRESSURE 5.000 PSI MAX FLOW 18 LPM MAX TEMP 90°C **PRODUCT CODE TRHC4642**



\$5,085 +GST

97

SPARE PARTS

BOILER COIL - STEEL PRODUCT CODE TRHC0583 PRICE \$1980 +GST



IGNITION ELECTRODES (NEED A PAIR PER BOILER) **PRODUCT CODE TRHC0531**

PRICE \$15 +GST





FAN BLADE PRODUCT CODE TRHC4095 PRICE \$24 +GST



IGNITION TRANSFORMER COIL - 12V DC PRODUCT CODE TRHC0988

PRICE \$665 +GST



FUEL 1.25 NOZZLE FUEL 1.35 NOZZLE FUEL 1.5 NOZZLE FUEL 1.75 NOZZLE **FUEL 2.0 NOZZLE**

PRICE \$45 +GST

TRHC3508 TRHC0373 TRHC0378 TRHC3509

TRHC0380

FUEL PUMP PRODUCT CODE TRHC0530 PRICE \$240 +GST



FUEL SOLENOID - 12V DC PRODUCT CODE TRHC3264 PRICE \$65 +GST



INSULATION GASKET - SMALL PRODUCT CODE TRHC3756 PRICE \$21 +GST



INSULATION GASKET - LARGE PRODUCT CODE TRHC3759 PRICE \$110 +GST



BOILERS

CC VERTICAL BOILER 240V AC - COMPLETE

MAX PRESSURE 4350 PSI MAX FLOW 21 LPM MAX TEMP 90°C **PRODUCT CODE TRHC3431**



\$1,900 +GST

SPARE PARTS

BOILER COIL PRODUCT CODE TRHC4646 PRICE \$690 +GST



PRICE \$150 +GST

IGNITION TRANSFORMER COIL - 240V AC

PRODUCT CODE TRHC0197

BOILER COIL - STAINLESS STEEL PRODUCT CODE TRHC4081 PRICE \$1800 +GST



FUEL 1.5 NOZZLE FUEL 1.75 NOZZLE TRHC0378 PRICE \$45 +GST

TRHC0373



FUEL PUMP - 240V AC PRODUCT CODE TRHC3452 PRICE \$140 +GST



IGNITION ELECTRODES (NEED A PAIR PER BOILER) **PRODUCT CODE TRHC3451** PRICE \$15 +GST

MOTOR FAN - 240V AC 110W PRODUCT CODE TRHC3453 PRICE \$175 +GST



FUEL SOLENOID - 240V AC

PRODUCT CODE TRHC5062

PRICE \$65 +GST



BOILERS

CC VERTICAL BOILER 12V DC - COMPLETE

MAX PRESSURE 4350 PSI MAX FLOW 21 LPM MAX TEMP 90°C **PRODUCT CODE TRHC3432**



\$3,850 +GST

SPARE PARTS

BOILER COIL PRODUCT CODE TRHC4646 PRICE \$690 +GST



BOILER COIL - STAINLESS STEEL PRODUCT CODE TRHC4081 PRICE \$1800 +GST



IGNITION ELECTRODES (NEED A PAIR PER BOILER) PRODUCT CODE TRHC3451 PRICE \$15 +GST





MOTOR FAN - 12V DC 13A 110W PRODUCT CODE TRHC3580

PRICE \$570 +GST

IGNITION TRANSFORMER COIL - 12V DC PRODUCT CODE TRHC0988 PRICE \$665 +GST



FUEL 1.25 NOZZLE TRHC0380 **FUEL 1.35 NOZZLE** TRHC3508 **FUEL 1.5 NOZZLE** TRHC0373

PRICE \$45 +GST





FUEL SOLENOID - 12V DC PRODUCT CODE TRHC3264 PRICE \$65 +GST



INSULATION PAD PRODUCT CODE TRHC3450 PRICE \$35 +GST



HIGH TENSION LEAD PRODUCT CODE TRHC3536 PRICE \$12 +GST PER METRE





TERMINALS HIGH TENSION PRODUCT CODE TRHC2046 PRICE \$1 +GST

ARE PARTS & ACCESSOR

101

BOILERS

CRISSY HORIZONTAL BOILER 240V AC

MAX PRESSURE 3000 PSI MAX FLOW 18 LPM MAX TEMP 65°C PRODUCT CODE TRHC5087



\$2,800 +GST

SPARE PARTS

BOILER COIL
PRODUCT CODE TRHC2906
PRICE \$1,030 +GST



IGNITION ELECTRODES FUEL PROD

(NEED A PAIR PER BOILER)
PRODUCT CODE TRHC0531
PRICE \$15 +GST

IGNITION TRANSFORMER COIL - 240V AC PRODUCT CODE TRHC0197

PRICE \$150 +GST



FAN BURNER - 240V AC COMPLETE
PRODUCT CODE TRHC3760
PRICE \$1380 +GST



MOTOR FAN - 240V AC 110W PRODUCT CODE TRHC4232 PRICE \$208 +GST



TRHC0373 TRHC0378



FUEL PUMP PRODUCT CODE TRHC0530 PRICE \$240 +GST



FUEL SOLENOID - 240V AC PRODUCT CODE TRHC0195 PRICE \$51 +GST



INSULATION GASKET - SMALL
PRODUCT CODE TRHC3756
PRICE \$21 +GST



FLAT FREE WHEELS

250MM WHEEL

4.10 / 3.50 - 4 PU
BEARING SIZE 20mm
WEIGHT RATING 200kg
HUB 70mm symmetric hub
PRODUCT CODE TRHC0369



\$25 +GST

310MM WHEEL

13 / 5.00 - 6 PU
BEARING SIZE 20mm
WEIGHT RATING 300kg
HUB 75mm symmetric hub
PRODUCT CODE TRHC3764



\$40 +GST

400MM WHEEL

4.80 / 4.00 - 8 PU
BEARING SIZE 1"
WEIGHT RATING 400kg
HUB 75mm symmetric hub
PRODUCT CODE TRHC2147



\$55 +GST

ENGINE PARTS

HONDA GX200

AIR FILTER
PRODUCT CODE TRHC4346 ▼
PRICE \$26 +GST



HONDA GX390

PRE AIR FILTER
PRODUCT CODE TRHC4349 ▼
PRICE \$12 +GST

AIR FILTER
PRODUCT CODE TRHC4347 ▼
PRICE \$32 +GST



HONDA GX630 HONDA GX690

AIR FILTER
PRODUCT CODE TRHC4348 ▼
PRICE \$86 +GST

FUEL FILTER
PRODUCT CODE TRHC4351

PRICE \$19 +GST

▼

OIL FILTER
PRODUCT CODE TRHC4350 ▼
PRICE \$27 +GST



ENGINE PARTS

KOHLER KD440

AIR FILTER
PRODUCT CODE TRHC4400 ▼
PRICE \$80 +GST

FUEL FILTER
PRODUCT CODE TRHC4399

PRICE \$45 +GST

SHUT OFF SOLENOID
PRODUCT CODE TRHC4287 ▼
PRICE \$295 +GST



KOHLER KD477

AIR FILTER
PRODUCT CODE TRHC3873 ▼
PRICE \$16 +GST

FUEL FILTER
PRODUCT CODE TRHC5224 ▼
PRICE \$50 +GST

OIL FILTER

PRODUCT CODE TRHC5223 ▼

PRICE \$52 +GST



YANMAR L100N

AIR FILTER
PRODUCT CODE TRHC5509 ▼
PRICE \$68 +GST

SHUT OFF SOLENOID
PRODUCT CODE TRHC5339 ▼
PRICE \$195 +GST



REDUCTION GEAR BOXES

6.5 HP GEAR BOX

Suits GX200

ENGINE SHAFT 3/4"
PUMP SHAFT 3/4"
GEAR BOX RATIO 2:1
HAWK CODE 244510
PRODUCT CODE TRHC0413



\$349 +GST

18 HP GEAR BOX

Suits L100N, KD440, GX390

ENGINE SHAFT 1"
PUMP SHAFT 24mm
GEAR BOX RATIO 2:1
HAWK CODE 244509
PRODUCT CODE TRHC0412



\$397 +GST

24 HP GEAR BOX

Suits GX630

ENGINE SHAFT 1"
PUMP SHAFT 24mm
GEAR BOX RATIO 2:1
HAWK CODE 244514
PRODUCT CODE TRHC3481



\$429 +GST

31 HP GEAR BOX

Suits GX690, KD477

PUMP SHAFT 1 1/8"
PUMP SHAFT 24mm
GEAR BOX RATIO 2:1
HAWK CODE 244515
PRODUCT CODE TRHC3480



\$499 +GST

HAWK PUMPS & SPARES





HAWK HD SERIES PUMPS

NOTE: Items without TRHC #'s are available but not stocked




PUMP	TRHC #	FLOW RATE	MAX P	RESSURE	RPM	POV	VER	DRIVE SHAFT	WGT KG. /	PRICE
MODEL	IKHC#	L/MIN	BAR	PSI	KPIM	HP	KW	DRIVE SHAFI	OIL (LITRES)	PRICE
HD1015L/R	TRHC5231	10	150	2200	1450	3.7	2.8	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1115L/R	TRHC1402	11	150	2200	1450	4.3	3.2	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1215L/R		12	150	2200	1450	4.6	3.4	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GST
HD1315L/R		13	150	2200	1450	5	3.7	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1415L/R		14	150	2200	1450	5.4	4	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD8515L/R		8.5	150	2200	1450	3.2	2.4	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1017L/R		10	170	2500	2800	4.4	3.2	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1117L/R		11	170	2500	2800	4.8	3.5	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1217L/R		12.5	170	2500	2800	5.4	4	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1
HD1417L/R	TRHC5232	14	170	2500	2800	6.1	4.5	Single PTO Ø24mm L /R	7.6 / 0.4	\$749 +GS1


SPARE PARTS KITS



	PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
	260044	KIT PLUNGER "U" SEAL Ø18(LD-LE-LG-HD)	TRHC2631	1	\$139 +GST
3	260046	KIT PLUNGER "U" SEAL Ø15 (HD)	-	1	\$139 +GST



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260043	KIT COMPLETE PLUNGER "U" SEAL Ø18(LD-LE-LG-HD)	TRHC2630	3	\$64 +GST
260045	KIT COMPLETE PLUNGER "U" SEAL Ø15(LD-LE-LG-HD)	-	3	\$64 +GST



λ	PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
J)	261404	CERAMIC PISTON PLUNGER KIT KIT COMPLETE CERAMIC PLUNGER Ø15(SST-HD-PSG1)	TRHC2660	3	\$44 +GST
	261405	KIT COMPLETE CERAMIC PLUNGER Ø18(LD-LE-LG-SST-HD)	TRHC2661	3	\$44 +GST







	PART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
)	260826	KIT PLUNG OIL SEALS(LD-LG-LE-PS-HD)	TRHC2656	1	\$10 +GST



	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
æ	261238	KIT COMPLETE MANIFOLD Ø15(HD)	-	1	\$537 +GST
	261239	KIT COMPLETE MANIFOLD Ø18(HD)	-	1	\$537+GST
D	PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
	310020	PREASS. CONN-ROD/PLUNG-ROD (HD)	TRHC3541	3	\$42 +GST

HAWK XXT SERIES PUMPS

NOTE:

Items without TRHC #'s are available but not stocked




BUMB MODEL	TRHC #	FLOW RATE	MAX PI	RESSURE	- RPM	POWE	R	- DRIVE SHAFT	WGT KG. /	PRICE
PUMP MODEL	IKHC#	L/MIN	BAR	PSI	KPINI	HP	KW	DRIVE SHAFT	OIL (LITRES)	PRICE
XXT4220IL /R	-	42	200	3000	1450	21.9	16.1	Single PTO Ø 24mm L /R	18.4 / 1.2	\$2,095 +GST
XXT5520IL /R	TRHC4677	55	200	3000	1450	28.8	21.2	Single PTO Ø 24mm L /R	18.4 / 1.2	\$2,095 +GST
XXT7012IL /R	-	70	120	1740	1450	21.3	15.6	Single PTO Ø 24mm L /R	18.4 / 1.2	\$2,095 +GST


SPARE PARTS KITS

OIL SEAL


KIT PLUNGER OIL SEAL (D-ST-LT-XLT-PX)



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260125	KIT, SEALS Ø22 (NEW XLT)	TRHC5616	1	\$125 +GST
260113	KIT, SEALS Ø25 (NEW XLT)	TRHC4688	1	\$151 +GST
260115	KIT, SEALS Ø28 (NEW XLT)	-	1	\$151 +GST



	PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
	260150	KIT COMPL.SEAL PACKING Ø22 XXT	-	3	\$55 +GST
es:	260149	KIT COMPL.SEAL PACKING Ø25 XXT	TRHC4682	3	\$60 +GST
	260148	KIT COMPL.SEAL PACKING Ø28 XXT	=	3	\$65 +GST



	PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
λ	260129	KIT COMP. CERAMIC PLUNGER Ø22 (NEW XLT)	TRHC5618	3	\$58 +GST
))	260117	KIT COMP. CERAMIC PLUNGER Ø25 (NEW XLT)	TRHC4684	3	\$60 +GST
	260118	KIT COMP. CERAMIC PLUNGER Ø28 (NEW XLT)	-	3	\$85 +GST



PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
260144	KIT, CHECK VALVE XXT	TRHC4683	6	\$35 +GST



	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
0	260147	KIT, COMPLETE MANIFOLD Ø22 XXT	· · · · ·	1	\$967 +GST
	260146	KIT, COMPLETE MANIFOLD Ø25 XXT		1	\$967 +GST
	260145	KIT. COMPLETE MANIFOLD Ø28 XXT	_	1	\$967 +GST

TRHC2625 1



30	PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
	310041	PREASS.CON-ROD/PLUNG-ROD (NEW XLT)		3	\$61 +GST

HAWK MTI SERIES PUMPS

NOTE:


Items without TRHC #'s are available but not stocked




	PUMP	REPLACED BY	FLOW RATE	MAX P	RESSURE	- RPM	POWI	ER	DRIVE SHAFT	WGT KG. / OIL (LITRES)	
ı	MODEL	MODEL	L/MIN	BAR	PSI	KPM	HP	KW	DRIVE SHAFI		
)	HC456IL /R	NMT1220L /R	12.5	200	3000	1450	6.4	4.7	Single PTO Ø24mm L /R	10 / 0.7	
1	HC456SIL /R	NMT1220SL/R	12.5	200	3000	1450	6.4	4.7	Single PTO Ø24mm L /R	10 / 0.7	
I	HC506IL /R	NMT1520L /R	15	200	3000	1450	7.7	5.7	Single PTO Ø24mm L /R	10 / 0.7	
ı	HC506SIL /R	NMT1520SL /R	15	200	3000	1450	7.7	5.7	Single PTO Ø24mm L /R	10 / 0.7	
I	HC556IL /R	NMT1820L /R	18	200	3000	1450	9.2	6.8	Single PTO Ø24mm L /R	10 / 0.7	
١	HC576IL /R	NMT2120L /R	21	200	3000	1450	10.7	7.9	Single PTO Ø24mm L /R	10 / 0.7	

SPARE PARTS KITS


OIL SEAL



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260801	KIT PLUNGER "V" SEAL Ø20x30 (ST-MT)	TRHC0429	1	\$70 +GST



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260800	KIT COMPLETE PLUNGER "V" SEAL Ø20(MT)	TRHC0428	3	\$41 +GST



PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260802	KIT COMPLETE CERAMIC PLUNGER Ø20(ST-MT-MTUV)	TRHC2651	3	\$43 +GST



PARI NO	VALVE ASSEMBLY KII	IRHC #	QIY/PUMP	PRICE EACH
260008	KIT COMPLETE VALVE CHECK 08(LT-NMT-NPM)NEUT	TRHC0424	6	\$13 +GST



PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
260813	KIT COMPLETE MANIFOLD 3/8" 3/8"(MT)	-	1	\$461 +GST
260814	KIT COMPLETE MANIFOLD 1/2" 3/8"(MTI)	-	1	\$461 +GST

TRHC2652

00000					
9000	PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
	310001	PREASS. CONN-ROB/PLUNG-ROD(MT-MTI-MTUV-PM)	TRHC2684	3	\$44 +GST

HAWK NMT SERIES PUMPS

NOTE:


Items without TRHC #'s are available but not stocked




\$485 +GST

-	PUMP	TDUG "	FLOW RATE	MAX PR	ESSURE	DD14	POWI	ER	DDD/F CLIAFT	WGT KG. /	PRICE
	MODEL	TRHC #	L/MIN	BAR	PSI	RPM	HP	KW	DRIVE SHAFT	OIL (LITRES)	PRICE
	NMT1220SL	-	12.5	200	3000	1000	6.4	4.7	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST
	NMT1220L/R	TRHC3466	12.5	200	3000	1450	6.4	4.7	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST
	NMT1520SL	-	15	200	3000	1000	7.7	5.7	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST
	NMT1520L/R	TRHC3434	15	200	3000	1450	7.7	5.7	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST
	NMT1820L/R	TRHC3435	18	200	3000	1450	9.2	6.8	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST
	NMT2120L/R	TRHC3436	21	200	3000	1450	10.7	7.9	Single PTO Ø24mm L /R	9.5 / 0.65	\$863 +GST

SPARE PARTS KITS





PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260078	KIT COMPLETE "U" SEALS PLUNGER Ø20(NMT)	TRHC3472	3	\$89 +GST
				7

PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260107	KIT COMPLETE CERAMIC PLUNGER Ø20 (NMT)	TRHC4076	3	\$43 +GST
PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
260008	KIT COMPLETE CHECK VALVE 08 (LT-NMT-NPM)NEUT	TRHC0424	6	\$13 +GST



PRICE EACH

\$10 +GST

	PARTAGO	OII STAL	TRUC "	OTY/PUMP	DDICE EACH
	PART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
	260803	KIT PLUNGER OIL SEAL(SST-MT-MTUV-ES)	TRHC2652	1	\$10 +GST
00	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
	260060	KIT COMPLETE MANIEOLD (NIMT)		1	\$442 + GST



0	PART NO	CON ROD PARTS	TRHC # QTY/PUMP	PRICE EACH
	310013	PREASS. CONN-ROD/PLUNG ROD (NMT-NPM1525)	TRHC4603 3	\$45 +GST

KIT PLUNGER OIL SEAL(SST-MT-MTUV-ES)

HAWK NPM SERIES PUMPS





NOTE: Items without TRHC #'s are available but not stocked

110

NPM1525R

NPM1125GR NPM1325GR NPM1425GR

PRICE EACH


\$93 +GST

\$45 +GST


P	PUMP MODEL	TRHC #	FLOW RATE	MAX PR	ESSURE	RPM	POWI	ER .	- DRIVE SHAFT	WGT KG. /	PRICE
7		IKHC#	L/MIN	BAR	PSI	KPINI	HP	KW	DRIVE SHAFI	OIL (LITRES)	PRICE
	NPM1525R	TRHC3465	15	250	3625	1450	9.6	7	Single PTO Ø24mm L /R	9.5 / 0.65	\$883 +GST
1	NPM1125GR	TRHC3468	11.5	250	3625	3400	7.2	5.3	1" Hollow-Shaft RIGHT	10.3 / 0.65	\$1,074 +GST
	NPM1325GR		13.5	250	3625	3400	8.5	6.2	1" Hollow-Shaft RIGHT	10.3 / 0.65	\$1,074 +GST
	NPM1425GR	-	14.5	250	3625	3400	9.3	6.8	1" Hollow-Shaft RIGHT	10.3 / 0.65	\$1,074 +GST
	NPM1725GR	TRHC4260	17	250	3625	3400	10.7	7.9	1" Hollow-Shaft RIGHT	10.3 / 0.65	\$1,074 +GST
	NPM1825R	TRHC5165	18	250	3625	1450	11.5	8.5	Single PTO Ø24mm L /R	10.3 / 0.65	\$883 +GST

SPARE PARTS KITS

KIT PLUNGER "U" SEAL Ø18(NPM1525)















		·			
s 2	60084	KIT PLUNGER "U" SEAL Ø15(NPMGR)	TRHC4261	1	\$120 +GST
P.	ART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
2	60080	KIT COMPLETE PLUNGER "U" SEAL Ø18(NPM1525)	TRHC3470	3	\$120 +GST
2	60085	KIT COMPLETE PLUNGER "U" SEAL Ø15(NPMGR)	TRHC4262	3	\$94 +GST
_					
P	ART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
2	60081	KIT COMPLETE CERAMIC PLUNG Ø18(NPM1525)	TRHC3471	3	\$40 +GST
2	60083	KIT COMPLETE CERAMIC PLUNG Ø15(NPMGR)	TRHC4263	3	\$49 +GST
P.	ART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
2	80008	KIT COMPLETE VALVE CHECK 08(LT-NMT-NPM)NEUT	TRHC0424	6	\$13 +GST
P.	ART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
2	60803	KIT PLUNGER OIL SEAL(SST-MT-MTUV-ES)	TRHC2652	1	\$10 +GST
_					
P.	ART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
2	60075	KIT COMPLETE MANIFOLD(NPM1525)	TRHC5780	1	\$442 +GST
2	60076	KIT COMPLETE MANIFOLD NPM	-	1	\$447 +GST
_D P	ART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
3	10013	PREASS. CONN-ROD/PLUNG-ROD (NMT-NPM1525)	TRHC4603	3	\$45 +GST


HAWK XLT SERIES PUMPS

NOTE: Items without TRHC #'s are available but not stocked




PUMP	REPLACED	FLOW RATE	MAX PRE	SSURE	DDA4	POWE	R	DRIVE SHAFT	WGT KG. /
MODEL	BY MODEL	L/MIN	BAR	PSI	RPM	HP	KW		OIL (LITRES)
HC930AL /R	XLT1830IL /R	18	300	4350	1450	13.9	10.2	Single PTO 25mm L /R	17.7 / 1.2
HC932AL /R	XLT2230IL /R	20	300	4350	1450	15.5	11.4	Single PTO 25mm L /R	17.7 / 1.2
HC932L /R	XLT2230IL /R	20	300	4350	1450	15.5	11.4	Single PTO 24 mm L /R	17.7 / 1.2
HC940AL /R	XLT2520L /R	25.5	200	3000	1450	13.1	9.6	Single PTO 25mm L /R	17.7 / 1.2
HC950AL /R	XLT3020L /R	30	200	3000	1450	15.4	11.3	Single PTO 25mm L /R	17.7 / 1.2
HC960AL /R	XLT3417L /R	34	170	2500	1450	14.9	11	Single PTO 25mm L /R	17.7 / 1.2

SPARE PARTS KITS



	PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
	262905	KIT PLUNGER 'U' SEAL Ø20X35 (930A-932A)	TRHC0435	1	\$105 +GST
s	260000	KIT PLUNGER 'V' SEAL Ø20X35 (LT-XLT)	-	1	\$83 +GST
	262906	KIT PLUNGER 'U' SEAL Ø22X35 (HC940A)	TRHC2679	1	\$105 +GST
	262907	KIT PLUNGER 'U' SEAL Ø25X35 (950A)	TRHC2680	1	\$105 +GST
	262915	KIT PLUNGER 'U' SEAL Ø28X40 (980A)	TRHC0436	1	\$127 +GST



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
262901	KIT COMP. PLUNGER 'U' SEAL Ø20 (930A-932A)	TRHC0434	3	\$56 +GST
260001	KIT COMP. PLUNGER 'V' SEAL Ø20 (LT-XLT)	-	3	\$49 +GST
262902	KIT COMP. PLUNGER 'U' SEAL Ø22 (HC940A)	TRHC2676	3	\$56 +GST
262903	KIT COMP. PLUNGER 'U' SEAL Ø25 (950A)	TRHC2677	3	\$56 +GST
262916	KIT COMP. PLUNGER 'U' SEAL Ø28 (980A)	TRHC2681	3	\$69 +GST



PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260004	KIT COMP. CERAMIC PLUNGER Ø20 (LT-XLT)	TRHC0423	3	\$61 +GST
260102	KIT COMP. CERAMIC PLUNGER Ø22 (LT-XLT)	-	3	\$55 +GST
260203	KIT COMP. CERAMIC PLUNGER Ø25 (LT-XLT)	TRHC2646	3	\$67 +GST
262917	KIT COMP. CERAMIC PLUNGER Ø28 (HC980A)	TRHC2682	3	\$87 +GST
		1		~



	PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
M	260010	KIT COMP. CHECK VALVE (XLT)	TRHC2312	6	\$18 +GST
IJ	260013	KIT COMP. BRASS CHECK VALVE (930/932A)	TRHC0426	6	\$33 +GST
				0	100



	PART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
	260003	KIT PLUNGER OIL SEAL (D-ST-LT-XLT-PX)	TRHC2625	9	\$12 +GST
			" Oal	00	
	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
	261225	KIT COMPL. MANIFOLD (HC930A-932A)	0000	1	\$1,095 +GST
3	260058	KIT COMPL. MANIFOLD (HC932A)		1	\$1,095 +GST
ı	261219	KIT COMPL. MANIFOLD (HC940A)		1	\$913 +GST
ı	261224	KIT COMPL. MANIFOLD (HC950A-960A)		1	\$913 +GST
١	261227	KIT COMPL. MANIFOLD (HC980A)	-	1	\$939 +GST
	- 6 a				
ı	PART NO	OIL SIGHT GLASS	TRHC #	QTY/PUMP	PRICE EACH
1	070005	Oil Sight Glass 3/4"	TRHC2559	1	\$10 +GST
1	070001	Oil Sight Glass 1/2"	TRHC0116	1	\$10 +GST
,[
	PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
	310000	PREASS.CON-ROD/PLUNG-ROD(LT-XLT)		3	\$62 +GST



PREASS. CONN-ROD/PLUNG-ROD (NPMGR)

HAWK NEW XLTI SERIES PUMPS

NOTE: Items without TRHC #'s are

available but not stocked



QTY/PUMP PRICE EACH

QTY/PUMP PRICE EACH


PUMP	TRHC #	FLOW RATE		PRESSURE	RPM	POW		DRIVE SHAFT	WGT KG. /	PRICE
MODEL		L/MIN	BAR	PSI		HP	KW		OIL (LITRES)	
XLT1830IL/R	TRHC3474	18	300	4350	1450	13.7	10.1	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT2230IL/R	TRHC3487	22	300	4350	1450	16.6	12.2	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT2520IL/R		25	200	3000	1450	12.9	9.4	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT2530IL/R		25	300	4350	1450	19.2	14.1	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT2730IL/R	TRHC3498	27	300	4350	1450	20.5	15.1	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT3020IL/R		30	200	3000	1450	15.5	11.4	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT3025IL/R		30	250	3625	1450	19.3	14.2	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT3325IL/R	- , -	33	250	3625	1450	21.4	15.7	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT3517IL/R	-	35	170	2500	1450	15.2	11.2	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT3816IS	-	38	160	2320	1450	15.9	11.7	Single PTO 24mm L /R	17.2 / 1.2	\$1,430 +GST
XLT4014IL/R	-	40	140	2030	1450	14	10.3	Single PTO 24mm L /R	17.2 / 1.2	\$1,435 +GST
XLT4017IL/R	-	40	170	2465	1450	17	12.5	Single PTO 24mm L /R	17.2 / 1.2	\$1,435 +GST
XLT4317IL/R		43	170	2465	1450	19.1	14.1	Single PTO 24mm L /R	17.2 / 1.2	\$1,435 +GST
XLT5015IL/R	TRHC4474	50	150	2175	1450	18.8	13.8	Single PTO 24mm L /R	17.2 / 1.2	\$1,435 +GST
XLT5415IL/R	0.	54	150	2175	1450	21.2	15.6	Single PTO 24mm L /R	17.2 / 1.2	\$1,435 +GST

SPARE PARTS KITS


PART NO CERAMIC PISTON PLUNGER KIT

VALVE ASSEMBLY KIT


KIT COMPL. MANIFOLD Ø25 (NEW XLT)



+GST
5 +GST
1 +GST
1 +GST
1



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260128	SEAL KIT COMP. PLUNGER ' Ø20 (New XLT)	TRHC3476	3	\$63 +GST
260127	SEAL KIT COMP. PLUNGER ' Ø22 (New XLT)	TRHC5617	3	\$70 +GST
260114	SEAL KIT COMP. PLUNGER ' Ø25 (New XLT)	TRHC5774	3	\$81 +GST
260116	SEAL KIT COMP. PLUNGER ' Ø28 (New XLT)	-	3	\$82 +GST



260130	KIT COMP. CERAMIC PLUNGER Ø20 (NEW XLT)	TRHC3477	3	\$56 +GST
260129	KIT COMP. CERAMIC PLUNGER Ø22 (NEW XLT)	TRHC5618	3	\$58 +GST
260117	KIT COMP. CERAMIC PLUNGER Ø25 (NEW XLT)	TRHC4684	3	\$60 +GST
260118	KIT COMP. CERAMIC PLUNGER Ø28 (NEW XLT)	-	3	\$85 +GST



200131	KIT COMP. BRASS CHECK VALVE (NEW XLT)	IKHC3109	0	\$19 +GSI
PART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
260003	KIT PLUNGER OIL SEAL (D-ST-LT-XLT-PX)	TRHC2625	1	\$12 +GST
PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
260133	KIT COMPL. MANIFOLD Ø20 (NEW XLT)	TRHC5779	1	\$896 +GST
260132	KIT COMPL. MANIFOLD Ø22 (NEW XLT)	-	1	\$924 +GST

\$ 5000000000000000000000000000000000000
and the same

260120	KII COMPL. MANIFOLD Ø28 (NEW XLI)	-	1	\$883 +GSI
PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
310041	PREASS.CON-ROD/PLUNG-ROD (NEW XLT)	-	3	\$61 +GST

HAWK PX SERIES PUMPS


NOTE:

Items without TRHC #'s are available but not stocked




PUMP MODEL	REPLACED BY MODEL	FLOW RATE L/MIN	MAX F	PRESSURE PSI	RPM	POWI HP	KW	DRIVE SHAFT	WGT KG. / OIL (LITRES)
PX125L /R	PX1135iL /R	12.5	350	5000	1450	11.5	8.4	Single PTO Ø25mm L /R	18.3 / 1.2
PX15L/R	PX1550iL /R	15	350	5000	1450	13.5	10	Single PTO Ø25mm L /R	18.3 / 1.2
PX17L/R	PX1735iL /R	17	350	5000	1450	15	11.2	Single PTO Ø25mm L /R	18.3 / 1.2
		51	"						

SPARE PARTS KITS



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260220	KIT PLUNGER 'U' SEAL Ø18(LH-PX2006)	TRHC2650	1	\$139 +GST



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260221	KIT COMPL. PLUNGER 'U'SEAL Ø18(LH-PX2006)	TRHC2318	3	\$73 +GST



PAKI NO	CERAMIC PISTON PLUNGER KIT	IRHC #	QIY/PUMP	PRICE EACH
261207	KIT COMPL. CERAMIC PLUNGER Ø18(ST-PM-PX)	TRHC2657	3	\$45 +GST



PART NO	VALVE ASSEMBLY KIT	TRHC # QTY/PU	JMP PRICE EACH
260017	KIT COMPL. CHECK VALVE (PX)	TRHC2626 6	\$17 +GST



OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
KIT PLUNGER OIL SEAL (D-ST-LT-XLT-PX)	TRHC2625	1	\$12 +GST



PART NO	MANIFOLD	TRH	C#	QTY/PUMP	PRICE EACH
261237	KIT COMPLETE MANIFOLD (PX2006)			1	\$1,043 +GST

HAWK PXI SERIES PUMPS

NOTE:

Items without TRHC #'s are available but not stocked



QTY/PUMP

TRHC #


TRHC2625

PRICE EACH


\$12 +GST

PUMP	TRHC #	FLOW RATE MAX PRES		RESSURE			ER	DDIVE CHAFT	WGT KG. /	PRICE
MODEL	IKHC#	L/MIN	BAR	PSI	RPM	HP	KW	DRIVE SHAFT	OIL (LITRES)	PRICE
PX1135IL /R		11.3	350	5000	1450	10.1	7.4	Single PTO Ø24mm L /R	19.2 / 1.2	\$1,919 +GST
PX1535IL /R		15.3	350	5000	1450	13.7	10.1	Single PTO Ø24mm L /R	19.2 / 1.2	\$1,919 +GST
PX1735IL /R	TRHC3499	16.9	350	5000	1450	15.2	11.2	Single PTO Ø24mm L /R	19.2 / 1.2	\$1,919 +GST
PX2135IL /R	TRHC3485	21.7	350	5000	1450	19.5	14.14	Single PTO Ø24mm L /R	19.2 / 1.2	\$1,919 +GST
PX1150IL /R		11.1	500	7250	1450	14.3	10.5	Single PTO Ø24mm L /R	19.2 / 1.2	\$2,141 +GST
PX1550IL /R		15.1	500	7250	1450	19.4	14.3	Single PTO Ø24mm L /R	19.2 / 1.2	\$2,141 +GST
PX1750IL /R	TRHC4671	16.7	500	7250	1450	21.4	15.8	Single PTO Ø24mm L /R	19.2 / 1.2	\$2,141 +GST
PX2150IL /R	TRHC4672	21.5	500	7250	1450	27.6	20.3	Single PTO Ø24mm L /R	19.2 / 1.2	\$2,141 +GST

SPARE PARTS KITS



	PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
	260212	KIT PLUNGER SEAL Ø16MM 350 BAR	TRHC4390	1	\$107 +GST
ce	260224	KIT PLUNGER SEAL Ø16MM 500 BAR	TRHC4674	1	\$109 +GST



	PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
3	260222	KIT COMPLETE PLUNGER SEAL Ø16MM 350 BAR	TRHC4391	3	\$70 +GST
е	260225	KIT COMPLETE PLUNGER SEAL Ø16MM 500 BAR	TRHC4678	3	\$74 +GST



Ŋ	PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
J	261201	KIT COMPLETE CERAMIC PLUNGER Ø16	TRHC4392	3	\$54 +GST



	PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
)	260019	KIT COMPLETE CHECK VALVE 350 BAR	TRHC4393	3	\$85 +GST
	260139	KIT COMPLETE CHECK VALVE 500 BAR	TRHC4681	3	\$89 +GST



ä	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
	260138	KIT COMPLETE MANIFOLD 16MM	-	1	\$1,123 +GST



PART NO	CON ROD PARTS	TRHC #	QTY/PUMP	PRICE EACH
310041	CON-ROD PLUNGER ASSEMBLY	-	3	\$61 +GST

HAWK HFR SERIES PUMPS


NOTE:

Items without TRHC #'s are available but not stocked




PUMP	TRHC #	FLOW RATE	MAX PR	RESSURE	RPM	POWE	R	DRIVE SHAFT	WGT KG. /	PRICE
MODEL	IKHC#	L/MIN	BAR	PSI	KPIN	HP	KW	DRIVE SHAFT	OIL (LITRES)	PRICE
HFR40SL /R	TRHC1412	40	280	4060	1000	28.6	21.1	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR60SL /R	TRHC1414	60	280	4060	1000	43	31.6	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR80SL /R	TRHC5640	80	150	2175	1000	30.5	22.4	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR105SL /R	-	105	150	2175	1000	40.3	30	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR120SL /R	-	120	150	2175	1000	46.1	33.8	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR40FL /R	TRHC1411	40	280	4060	1450	28.6	21.1	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST
HFR60FL /R	TRHC1413	60	280	4060	1450	43	31.6	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800+GST
HFR80FL /R	TRHC1415	80	280	4060	1450	57.5	42.1	Single PTO Ø 40mm L /R	48 / 3.5	\$6,800 +GST


SPARE PARTS KITS



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260060	KIT PLUNGER 'V' SEALS Ø30 (HFR)	TRHC2635	1	\$422 +GST
260095	KIT PLUNGER SEALS Ø40 (HFR80S/105S/120S)	TRHC5540	1	\$423 +GST



	PARI NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
	260061	KIT COMPL.PLUNG 'V'SEALS Ø30(HFR)	TRHC2636	3	\$242+GST
s	260094	KIT COMPL.PLUNG SEALS (HFR80S/105S/120S)	TRHC5541	3	\$242 +GST
			-	-	



PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260062	KIT COMPL. CERAMIC PLUNGER Ø30(HFR)	TRHC2637	3	\$124 +GST
260091	KIT CERAMIC PLUNG Ø40(HFR)	TRHC5542	3	\$132 +GST



PART NO	VALVE ASSEMBLY KIT	TRHC # QTY/PUMP	PRICE EACH
260063	KIT COMPLETE CHECK VALVE ASSEMBLY (HFR)	TRHC2638 6	\$50 +GST
260093	KIT , CHECK VALVE (HFR80S/105S/120S)	TRHC5543 6	\$50 +GST
000		••••	



260064	KIT OIL SEALS (HFR/HHP)	TRHC2639	1	\$10 +GST
PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
260065	KIT COMPLETE MANIFOLD (HFR)		1	\$2,382 +G
260092	KIT COMPLETE MANIFOLD (HFR80S/105S/120S)		1	\$2,382 +G
	PART NO 260065	PART NO MANIFOLD 260065 KIT COMPLETE MANIFOLD (HFR)	PART NO MANIFOLD TRHC # 260065 KIT COMPLETE MANIFOLD (HFR)	PART NO MANIFOLD TRHC # QTY/PUMP 260065 KIT COMPLETE MANIFOLD (HFR) - 1

HAWK PUMPS & SPARES

PART NO OIL SEAL

KIT PLUNGER OIL SEAL

HAWK HHP SERIES PUMPS


NOTE:

Items without TRHC #'s are available but not stocked




DUMP MODEL TRUE #		FLOW RATE	MAX PR	ESSURE	DDM	POWE	R	DDIVE CLIAFT	WGT KG. /	DDICE
PUMP MODEL	TRHC #	L/MIN	BAR	PSI	RPM	HP	KW	DRIVE SHAFT	OIL (LITRES)	PRICE
HHP38FL /R		38	350	5000	1450	34.1	25.1	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP25SL /R	TRHC2893	25	500	7250	1000	32.6	24	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP30SL /R	TRHC2892	30	500	7250	1000	37	27.2	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP2750L /R		27	500	7250	1450	35.5	26.1	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP3650L /R		36	500	7250	1450	46.9	34.5	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP4150L /R	TRHC4670	41	500	7250	1450	53.7	39.5	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST
HHP5040L /R		50	400	5800	1740	51.5	37.9	Single PTO Ø 40mm L /R	51 / 3.5	\$8,567 +GST


SPARE PARTS KITS



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260070	KIT PLUNGER SEALS Ø20(HHP)	TRHC3439	1	\$156 +GST



	PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
	260071	KIT COMPL. PLUNGER SEALS Ø20(HHP)	TRHC3440	3	\$120 +GST
ü	260082	KIT COMPL. SEAL PACKING Ø20(HHPXX50)	TRHC5629	3	\$141 +GST



PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260072	KIT COMPL. CERAMIC PLUNGER Ø20(HHP)	TRHC5630	3	\$122 +GST
260097	KIT, CERAMIC PLUNGER Ø20(HHP)	TRHC3441	3	\$149 +GST



PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
260073	KIT COMPLETE CHECK VALVE (HHP38F)	-	6	\$65 +GST
260086	KIT COMPLETE CHECK VALVE (HHP25S/30S)	TRHC3442	6	\$65 +GST
260098	KIT COMPLETE CHECK VALVE (HPXX50)	TRHC5631	6	\$65 +GST



PAKI NO	OIL SEAL	IKHC #	QIT/PUMP	PRICE EACH
260064	KIT OIL SEALS (HFR/HHP)	TRHC2639	1	\$10 +GST
PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH

\$3,897 +GST

\$4,365 +GST

KIT COMPLETE MANIFOLD (HHP25S/30S)500BAR TRHC3443 1

KIT COMPLETE MANIFOLD (HP500 BAR)1450RPM




HAWK NHD SERIES PUMPS

NOTE: Items without TRHC #'s are available but not stocked




DUMP MODEL TRUC "		FLOW RATE	MAX PR	ESSURE	RPM	POWER		- DRIVE SHAFT	WGT KG. / PRICE	
PUMP MODEL	TRHC #	L/MIN	BAR	PSI	KP/W	HP	KW	DRIVE SHAFI	OIL (LITRES)	PRICE
NHD8515L /R	-	8.5	150	2200	1450	3.2	2.4	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1015L /R	TRHC5743	10	150	2200	1450	3.7	2.8	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1115L /R	-	11	150	2200	1450	4.3	3.2	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1215L /R	TRHC5641	12	150	2200	1450	4.6	3.4	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1315L/R	-	13	150	2200	1450	5.0	3.7	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1415L /R	-	14	150	2200	1450	5.4	4.0	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST
NHD1515L /R	-	15	150	2200	1450	5.8	4.3	Single PTO Ø 24mm L /R	6.6 / 0.4	\$749 +GST

SPARE PARTS KITS



PART NO	SEAL PACKING KIT	TRHC #	QTY/PUMP	PRICE EACH
260189	KIT PLUNGER SEAL Ø16	TRHC5642	1	\$69 +GST



PART NO	SEAL KIT COMPLETE	TRHC #	QTY/PUMP	PRICE EACH
260188	KIT COMPLETE PLUNGER Ø16	TRHC5643	3	\$53 +GST



PART NO	CERAMIC PISTON PLUNGER KIT	TRHC #	QTY/PUMP	PRICE EACH
260190	KIT COMPLETE CERAMIC PLUNGER Ø16	TRHC5644	3	\$28 +GST



PART NO	VALVE ASSEMBLY KIT	TRHC #	QTY/PUMP	PRICE EACH
260012	KIT COMPLETE CHECK VALVE	TRHC0425	6	\$10 +GST



PART NO	OIL SEAL	TRHC #	QTY/PUMP	PRICE EACH
260826	KIT PLUNGER OIL SEAL	TRHC2656	1	\$10 +GST



0	PART NO	MANIFOLD	TRHC #	QTY/PUMP	PRICE EACH
	260187	KIT COMPLETE MANIFOLD Ø16		1	\$371 +GST



www.thoroughclean.com.au Ph: (07) 5467 2025

